



# PCB RELAYS

The Arlin relay catalogue provides detailed information on:

- Sensitive relays for telecommunications
- Power relays for 240 volt switching
- Safety relays with forced guided contacts
- Reed relays for fast switching

This catalogue covers the most popular relays, many of which are regular stock lines. In addition, Arlin offers the full range of relay products from Schrack, OEG, Axicom, Potter&Brumfield and Meder. Many of our relays are pin compatible with other well-known brands.

Arlin has over 25 years experience in relay marketing. Our engineering support service is readily available to assist in relay selection and to provide additional technical data and cross reference information.

For a competitive quotation or engineering assistance please contact Arlin:



28 Commercial Drive Thomastown Vic 3074 Australia

**Sales Hotline: 1300 362 191**

Int. Tel: +61 3 9465 0011

Fax: +61 3 9465 5088

Email: [sales@arlin.com.au](mailto:sales@arlin.com.au)

**[www.arlin.com.au](http://www.arlin.com.au)**

# CONTENTS

## TELECOMMUNICATIONS / SIGNAL RELAYS

<b>V23079(P2)</b>	2A DPDT, PCB & SMD, High isolation	<u>3</u>
<b>FP2</b>	2A DPDT Miniature low profile PCB	<u>5</u>
<b>MT2</b>	2A DPDT High sensitivity PCB	<u>7</u>

## POWER RELAYS

<b>SRUUh</b>	10/15A SPDT 240v switching PCB	<u>9</u>
<b>ODH</b>	10A SPDT 120/240v switching PCB	<u>11</u>
<b>OMI</b>	5/10A SPDT & DPDT 240v PCB	<u>13</u>
<b>RT</b>	8/16A SPDT & DPDT 240v switching PCB Low profile with DC or AC coil	<u>17</u>
<b>T9A</b>	20/30A SPST & SPDT 240v PCB or QC terminals	<u>21</u>

## REED RELAYS - FAST ACTING, SEALED CONTACTS

<b>DIP</b>	Dual in-line with 1A, 1B, 2A or 1C contacts PCB	<u>24</u>
<b>BE</b>	High isolation with 1A, 1B, or 2A contacts PCB	<u>26</u>

**Request your copy of separate INDUSTRIAL & CONTROL RELAYS catalogue for DIN rail mount relays:**




# V23079 (P2) series

## 5 Amp Switching, High Dielectric DPDT Polarized FCC Part 68 PC Board Relay

File E48393

File LR45064

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.



### Features

- Surface and through hole mounting types.
- Breakdown voltage between contacts and coil: 1,500Vrms.
- Surge withstand between contacts and coil: 2,500V (Bellcore).
- High capacity contact: 2A @ 30VDC.
- 2 Form C contact arrangement.
- Board space saving, vertical mount (14.6 x 7.2mm surface area).
- Immersion cleanable, plastic sealed case.
- Single and dual coil latching versions available.
- Basic insulation (coil-to-contact) according to EN 60950 / UL 1950.
- Ultrasonic cleaning is not recommended.

### Contact Data @ 23°C

**Arrangement:** 2 Form C (DPDT) bifurcated contacts.

**Material:** Gold overlay on silver nickel.

**Rating:**

**Max. Switching Voltage:** 250VAC, 220VDC.

**Max. Switching Current:** 5A.

**Max Carrying Current:** 2A.

**Max Switching Power:** 60W, DC; 62.5VA, AC.

**Min. Permissible Load:** 100µV.

**UL/CSA Rating:** 1A @ 30VDC; 300mA @ 110VDC;  
500mA @ 120VAC; 250mA @ 240VAC.

**Expected Mechanical Life:** Approx. 100 million ops.

**Expected Electrical Life:** 50 million ops. @ 10mA, 12V,

10 million ops. @ 100mA, 6V.

1 million ops. @ 1A, 30V,

500,000 ops. @ 500mA, 60V.

200,000 ops. @ 2A, 30V.

**Initial Contact Resistance:** 50 milliohms @ 10mA, 20mV.

**Thermoelectric potential:** <10µV.

### High Frequency Data

**Capacitance:** Between Open Contacts: 2pF, max.

Between Coil and Contacts: 1.5pF, max.

Between Poles: 1pF, max.

**RF Characteristics:** Isolation at 100 / 900 MHz: -39.0 db / -20.7 db.

Insertion loss at 100 / 900 MHz: -0.02 db / -0.27 db.

V. S. W. R. at 100 / 900 MHz: 1.04 db / 1.40 db.

### Initial Dielectric Strength

**Between Open Contacts:** 1,000Vrms for 1 minute. (1,500Vrms on request, consult factory for availability).

**Between Coil and Contacts:** 1,500Vrms for 1 minute. (single coil relay).

**Between Poles:** 1,000Vrms for 1 minute.

**Surge Voltage Resistance per Bellcore TR-NWT-001089 (2 / 10 µs):**

Between Open Contacts: 2,000V.

Between Coil and Contacts: 2,500V (single coil relay).

Between Poles: 2,500V.

**Surge Voltage Resistance per FCC 68 (10 / 160 µs):**

Between Open Contacts: 1,500V.

Between Coil and Contacts: 1,500V (single coil relay).

Between Poles: 1,500V.

### Initial Insulation Resistance

**Between Mutually Insulated Conductors:** 10<sup>9</sup> ohms @ 500VDC.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.

### Coil Data @ 23°C

**Voltage:** 3-24V.

**Nominal Power:** 70mW-140mW, dependent on model. See chart below.

Nominal Voltage (VDC)	Operating Range @ 23°C		@ 85°C		Coil Resistance @ 23°C
	Must Operate Voltage (VDC)	Max. Voltage (VDC)	Max. Voltage (VDC)	Max. Voltage (VDC)	
<b>Non-Latching, 140mW Nominal Power</b>					
3	2.25	6.5	3.4	64.3 ± 6	
4.5	3.375	9.8	5.1	145 ± 15	
5	3.75	10.9	5.7	178 ± 18	
6	4.50	13.0	6.8	257 ± 26	
9	6.75	19.6	10.3	578 ± 58	
12	9.0	26.1	13.8	1,029 ± 103	
24	18.0	52.3	27.7	4,114 ± 411	
<b>Single Coil Latching, 70mW Nominal Power</b>					
3	2.25	9.2	4.8	128 ± 13	
4.5	3.375	13.8	7.3	289 ± 29	
5	3.75	15.3	8.1	357 ± 36	
6	4.5	18.5	9.8	514 ± 51	
9	6.75	27.7	14.6	1,157 ± 116	
12	9.0	37.0	19.6	2,057 ± 206	
24	18.0	74.0	39.2	8,228 ± 823	
<b>Dual Coil Latching, 140mW Nominal Power</b>					
3	2.25	6.5	-	64.3 ± 6	
4.5	3.375	9.8	-	145 ± 15	
5	3.75	10.9	-	178 ± 18	
6	4.5	13.0	-	257 ± 26	
9	6.75	19.6	-	578 ± 58	
12	9.0	26.1	-	1,029 ± 103	
24	18.0	52.3	-	4,114 ± 411	

### Operate Data @ 23°C

**Must Operate Voltage:** 75% of nominal or less.

**Must Release Voltage:** 10% of nominal or more.

**Operate Time** (at nominal voltage): 3 ms, typ.; 5 ms, max.

**Reset Time** (at nominal voltage): 3 ms, typ.; 5 ms, max.

**Release Time** (non-latching w/o diode in parallel): 2 ms, typ.; 4 ms, max.

**Release Time** (non-latching with diode in parallel): 4 ms, typ.; 6 ms, max.

**Bounce Time** (at contact close): 1 ms, typ.; 3 ms, max.

**Maximum Switching Rate** (no load): 50 operations/s.

### Environmental Data

**Temperature Range:** -40°C to +85°C.

**Maximum Allowable Coil Temperature:** 110°C.

**Thermal Resistance:** < 165K/W.

**Shock, half sinus, 11 ms: Functional:** 50g.

**Shock, half sinus, 11 ms: Destructive:** 150g.

**Vibration, 10-1,000 Hz.: Functional:** 35g.

**Needle Flame Test:** Application time 20s, burning time <15s.

**Resistance to Soldering Heat:** 260°C for 10s.

### Mechanical Data

**Termination:** Through hole or surface mount printed circuit terminals.

**Mounting Position:** Any.

**Enclosure:** Immersion cleanable (IP67) plastic case.

**Weight:** .084 oz. (2.5g) approximately.

**Ordering Information**

Typical Part Number ▶

**V23079**

**A10**

**01**

**B301**

**1. Basic Series:**

V23079 = P2 Miniature, printed circuit board relay.

**2. Termination:**

	Non-Latching Normal Ht.	Non-Latching Reduced Ht.	Dual Coil Latching	Single Coil Latching
Through-Hole	<b>A10</b>	<b>A20<sup>(1)</sup></b>	<b>B12</b>	<b>C11</b>
SMT Extended Terminal	<b>D10</b>	<b>D20<sup>(1)</sup></b>	<b>E12</b>	<b>F11</b>
SMT Short Terminal	<b>G10</b>	<b>G20<sup>(1)</sup></b>	<b>H12</b>	<b>J11</b>

**3. Coil Voltage:**

08 = 3VDC 11 = 4.5VDC 01 = 5VDC 02 = 6VDC 06 = 9VDC 03 = 12VDC 05 = 24VDC<sup>(2)</sup>

**4. Contact Type:**

B301 = Bifurcated, 2 Form C (DPDT), Silver Nickel.

(1) Reduced mounting height of 10.0 mm, as opposed to 10.4 mm (SMT) or 9.6 mm as opposed to 9.9 (through-hole). Non-latching only, not available with 24V coil.


(2) Not available with Termination A20, D20 or G20.

**Our authorized distributors are more likely to stock the following items for immediate delivery.**

V23079A1001B301	V23079A1011B301	V23079A2011B301	V23079D1005B301	V23079D2003B301
V23079A1003B301	V23079A2001B301	V23079D1001B301	V23079D1011B301	V23079D2011B301
V23079A1005B301	V23079A2003B301	V23079D1003B301	V23079D2001B301	


**Outline Dimensions**

**THT**




**Note:** Mounting height varies dependent upon Termination type selected in step 2 of Ordering Information

**SMT**

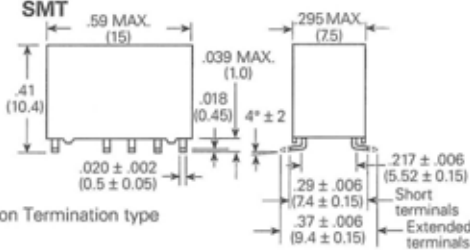


**Wiring Diagrams (Bottom Views)**

**Single Coil Latching\* and Single Coil Non-latching\*\***



**Dual Coil Latching\*\*\***



**Note:** All diagrams shown in de-energized or reset position.

**\*Note:** For non-latching versions, coil polarity must be observed.

**\*\*Note:** For single coil latching versions, polarity shown results in "set" condition. Reverse polarity results in "reset" condition.

**\*\*\*Note:** The contact position illustrated shows the reset condition. If a positive potential is applied to terminal 1 or 7, the relay adopts the set position.

**Coil Limits**

$U_i$  = Minimum voltage at 23° C after pre-energizing with nominal voltage without contact current  
 $U_a$  = Maximum continuous voltage at 23°

The operating voltage limits  $U_i$  and  $U_a$  depend on the temperature according to the formula:

$U_{i, amb} = K_i \cdot U_{i, 23°C}$

and


$U_{a, amb} = K_a \cdot U_{a, 23°C}$

$t_{amb}$  = Ambient temperature

$U_{i, amb}$  = Minimum voltage at ambient temperature,  $t_{amb}$

$U_{a, amb}$  = Maximum voltage at ambient temperature,  $t_{amb}$

$K_i, K_a$  = Factors (dependent on temperature), see diagram

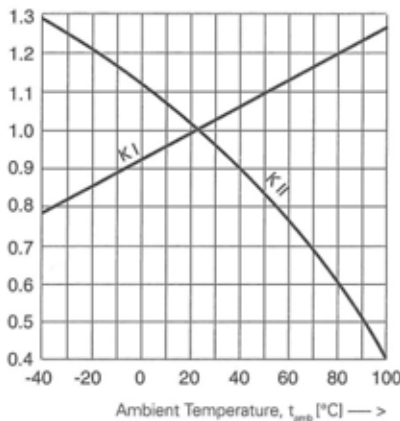


**Packaging Information**


THT P2 relays are shipped in tubes of 50. There are 2,000 relays in a carton. SMT P2 relays with long terminals are shipped in reels of 400, with 2,000 relays in a carton. SMT P2 relays with short terminals are shipped in reels of 500. There are 2,500 relays in a full carton.

**Recommended Soldering Conditions** (according to CECC 00802)

**Vapor Phase Soldering: Temperature/Time Profile (Lead Temperature)**

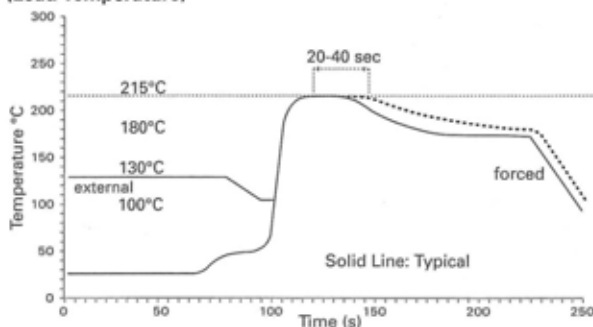

**Infrared Soldering: Temperature/Time Profile (Lead Temperature)**

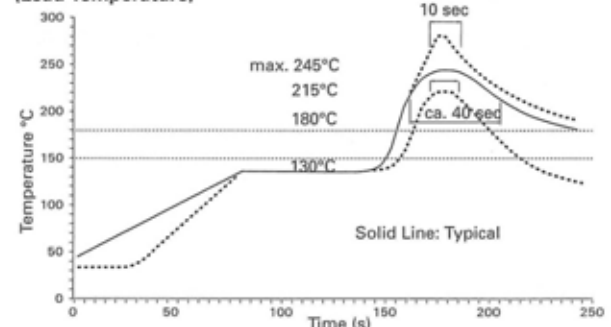

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.



# FP2 series

## DPDT Low Profile Telecom/Signal PC Board Relays

File E111441

File 169679-1079886

16501-003

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Features

- Through hole PC board terminals.
- Meets FCC Part 68 and ITU-T K20.
- For applications in telecommunications, office automation, consumer electronics, medical equipment, measurement and control equipment.
- Immersion cleanable, plastic sealed case.
- 80mW coil for high sensitivity models, 140mW coil for sensitive types.
- Ultrasonic cleaning not recommended.

### Contact Data @ 23°C (except as noted)

**Arrangement:** 2 Form C (DPDT) bifurcated contacts.

**Material:** Stationary: Silver-nickel, gold covered.

**Ratings:** Max. Switched Current: 2A.

Max. Carry Current: 2A (at max ambient temperature).

Max. Switched Voltage: 125VDC, 250VAC.

Max. Switched Power: 30W DC or 62.5VA AC.

UL/CSA Ratings: 500mA @ 50VDC; 1.25A @ 30VDC;  
500mA @ 50VAC.

**Initial Contact Resistance:** <70 milliohms @ 10mA / 20mV.

**Expected Mechanical Life:** 100 million operations.

**Expected Electrical Life:** 2.5 million operations @ 10mA / 30mVDC.  
2 million operations @ cable load open end.  
100,000 operations @ 240mA / 125VDC.  
100,000 operations @ 250mA / 250VDC.  
100,000 operations @ 1.25A / 24VDC.

**Thermoelectric potential:** <10µV.

### High Frequency Data

**Capacitance:** Between Open Contacts: 1pF, max.  
Between Coil and Contacts: 4pF, max.  
Between Poles: 1pF, max.

**RF Characteristics:** Isolation at 100 / 900 MHz: -40.2 db / -22.3 db.  
Insertion loss at 100 / 900 MHz: -0.03 db / -0.25 db.  
V. S. W. R. at 100 / 900 MHz: 1.01 db / 1.07 db.

### Initial Dielectric Strength

Between Open Contacts: 700Vrms for 1 minute.  
Between Coil and Contacts: 1,000Vrms for 1 minute.  
Between Poles: 1,000Vrms for 1 minute.  
**Surge Voltage Resistance per FCC 68 (10 / 160 µs) and IEC (10 / 700 µs):**  
Between Open Contacts: 1,500V.  
Between Coil and Contacts: 1,500V.  
Between Poles: 1,500V.

### Initial Insulation Resistance

Between Contact and Coil: 10<sup>9</sup> ohms or more @ 500VDC.

### Coil Data @ 23°C

**Voltage:** 3 to 48VDC.  
**Nominal Power:** 80-300mW depending on models. See coil data tables.  
**Duty Cycle:** Continuous.

### Coil Data @ 23°C

Nom. Voltage (VDC)	Operate/Set Range		Minimum Release/Reset Voltage (VDC)	Nom. Power (mW)	Resistance ±10% (Ohms)	Part Number
	Min. Voltage (VDC)	Max. Voltage (VDC)				
Non-latching 1 coil versions						
3	2.1	6.8	0.3	140	64	D3006
4.5	3.15	10.3	0.45	140	145	D3004
5	3.5	11.4	0.5	140	178	D3009
6	4.2	13.7	0.6	140	257	D3005
9	6.3	20.4	0.9	140	574	D3010
12	8.4	27.3	1.2	140	1,028	D3002
24	16.8	45.7	2.4	200	2,880	D3012
48	33.6	67.5	4.8	300	7,680	D3013
Non-latching, sensitive 1 coil versions						
3	2.25	9.0	0.3	80	113	D3021
4.5	3.38	13.5	0.45	80	253	D3022
5	3.75	15.0	0.5	80	313	D3023
6	4.5	18.0	0.6	80	450	D3024
9	6.75	27.1	0.9	80	1,013	D3025
12	9.0	36.1	1.2	80	1,800	D3026
24	18.0	54.7	2.4	140	4,114	D3027
48	36.0	72.5	4.8	260	8,882	D3028
Latching 1 coil versions						
3	2.25	8.1	-2.25	100	90	D3041
4.5	3.375	12.1	-3.375	100	203	D3042
5	3.75	13.5	-3.75	100	250	D3043
6	4.5	16.2	-4.5	100	360	D3044
9	6.75	24.2	-6.75	100	810	D3045
12	9.0	29.0	-9.0	100	1,440	D3046
24	18.0	47.5	-18.0	150	3,840	D3047
Latching 2 coil versions						
3	2.1	5.7	2.1	200	45	D3061
4.5	3.15	8.6	3.15	200	101	D3062
5	3.5	9.5	3.5	200	125	D3063
6	4.2	11.4	4.2	200	180	D3064
9	6.3	17.1	6.3	200	405	D3065
12	8.4	22.6	8.4	200	720	D3066
24	16.8	33.7	16.8	200	1,920	D3067

### Operate Data @ 23°C

**Operate and Release Voltage:** See values in chart above.  
**Operate Time** (at nominal voltage): 3 ms, typ.; 4 ms, max.  
**Reset Time** [latching](at nominal voltage): 3 ms, typ.; 4 ms, max.  
**Release Time** [non-latching](w/o diode in parallel): 1 ms, typ.; 3 ms, max.  
**Release Time** [non-latching](with diode in parallel): 3 ms, typ.; 4 ms, max.  
**Bounce Time** (at contact close): 1 ms, typ.; 5 ms, max.  
**Maximum Switching Rate** (no load): 50 operations/s.

### Environmental Data

**Temperature Range:** -55°C to +85°C.  
**Maximum Allowable Coil Temperature:** 110°C.  
**Thermal Resistance:** < 185K/W.  
**Shock, half sinus, 11 ms: Functional:** 50g.  
**Shock, half sinus, 11 ms: Destructive:** 1,500g.  
**Vibration, 10-500 Hz: Functional:** 20g.  
**Needle Flame Test:** Application Time 20s.  
**Resistance to Soldering:** 260°C for 10s.

### Mechanical Data

**Termination:** Through-hole printed circuit terminals.  
**Mounting Position:** Any.  
**Enclosure Type:** Immersion cleanable (IP67) plastic case.  
**Weight:** 0.08 oz. (2g) approximately.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.



$U_l$  = Minimum voltage at 23° C after pre-energizing with nominal voltage without contact current  
 $U_u$  = Maximum continuous voltage at 23°

The operating voltage limits  $U_l$  and  $U_u$  depend on the temperature according to the formula:

$$U_{l \text{ tamb}} = K_l \cdot U_{l \text{ 23}^\circ \text{C}}$$

and


$$U_{u \text{ tamb}} = K_u \cdot U_{u \text{ 23}^\circ \text{C}}$$

$t_{\text{amb}}$  = Ambient temperature

$U_{l \text{ tamb}}$  = Minimum voltage at ambient temperature,  $t_{\text{amb}}$

$U_{u \text{ tamb}}$  = Maximum voltage at ambient temperature,  $t_{\text{amb}}$

$K_l, K_u$  = Factors (dependent on temperature), see diagram

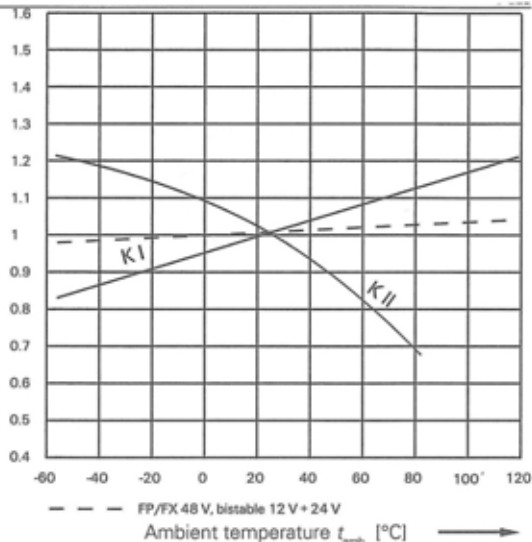

### Ordering Information

See "Part Number" column in Coil Data chart on previous page for available part numbers in the FP2 series.


### Packaging Information

FP2 series relays are shipped in tubes of 50. There are 1,000 relays in a full carton.


**Our authorized distributors are more likely to stock the following items for immediate delivery.**

None at present.

### Outline Dimensions

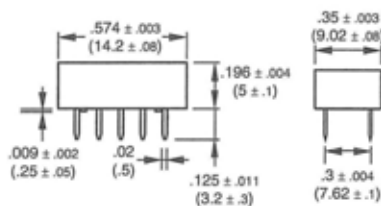


### PC Board Layout (Bottom View)

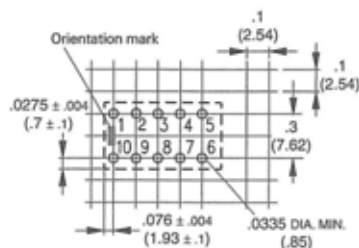


### Wiring Diagrams (Bottom Views)

#### Non-Latching and Latching, 1 Coil Release or Reset Condition



#### Latching, 2 Coil Reset Condition



Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.

# MT2 series

## DPDT Telecom/Signal PC Board Relays



File E111441

File 176679-1079886

16502-001

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Features

- Through hole type terminals.
- Meets FCC Part 68 and ITU-T K20.
- For applications in telecommunications, office automation, consumer electronics, medical equipment, measurement and control equipment.
- Immersion cleanable, plastic sealed case.
- 150mW, 200mW, 300mW, 400mW or 550mW coil.
- Ultrasonic cleaning not recommended.

### Contact Data @ 23°C (except as noted)

**Arrangement:** 2 Form C (DPDT) bifurcated contacts.

**Material: Stationary:** Silver-nickel, gold covered.

**Ratings: Max. Switched Current:** 2A.

**Max. Carry Current:** 1.25A (at max ambient temperature).

**Max. Switched Voltage:** 150VDC, 150VAC.

**Max. Switched Power:** 30W DC or 62.5VA AC.

**UL/CSA Ratings:** 400mA @ 125VAC; 1.25A @ 24VDC.

**Initial Contact Resistance:** <70 milliohms @ 10mA / 20mV.

**Expected Mechanical Life:** 100,000,000 ops.

**Expected Electrical Life:** 5 million operations @ 10mA / 30mVDC.

2.5 million operations @ cable load open end.

200,000 operations @ 1.25A / 24VDC, res.

200,000 operations @ 200mA / 150VDC, res.

**Thermoelectric potential:** <10µV.

### High Frequency Data

**Capacitance: Between Open Contacts:** 2pF, max.

**Between Coil and Contacts:** 4pF, max.

**Between Poles:** 2pF, max..

**RF Characteristics: Isolation at 100 / 900 MHz:** -31.8 db / -14.2 db.

**Insertion loss at 100 / 900 MHz:** -0.02 db / -0.97 db.

**V. S. W. R. at 100 / 900 MHz:** 1.03 db / 1.31 db.

### Initial Dielectric Strength

**Between Open Contacts:** 700Vrms for 1 minute.

**Between Coil and Contacts:** 1,050Vrms for 1 minute.

**Between Poles:** 700Vrms for 1 minute.

**Surge Voltage:** 1,500V surge per FCC Part 68 and IEC.

### Initial Insulation Resistance

**Between Contact and Coil:** 10<sup>9</sup> ohms or more @ 500VDC.

### Coil Data @ 23°C

**Voltage:** 4.5 to 48VDC.

**Nominal Power:** See Coil Data table.

**Duty Cycle:** Continuous.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.

### Coil Data @ 23°C

Nominal Voltage (VDC)	Minimum Voltage (VDC)	Maximum Voltage (VDC)	Minimum Release Voltage (VDC)	Resistance ±10% (Ohms)	Part Number
150mW versions					
4.5	3.2	10.1	0.45	136	C 93406
5	3.6	11.3	0.50	168	C 93401
6	4.3	13.4	0.60	240	C 93427
9	6.4	20.3	0.90	544	C 93405
12	8.6	27.1	1.2	968	C 93402
24	174.1	54.1	2.4	3,872	C 93404
48	33.1	108.3	4.8	15,468	C 93404
200mW versions					
4.5	2.9	8.7	0.45	101	C 93415
5	3.3	9.7	0.5	125	C 93416
6	3.9	11.6	0.6	180	C 93428
9	5.9	17.5	0.9	405	C 93417
12	7.8	23.3	1.2	720	C 93418
24	15.6	46.7	2.4	2,880	C 93419
48	31.2	93.4	4.8	11,520	C 93420
300mW versions					
4.5	3.1	7.4	0.45	73	C 93433
5	3.4	8.2	0.5	90	C 93434
12	8.25	19.7	1.2	515	C 93412
24	16.5	39.5	2.4	2,060	C 93435
48	32.5	79.0	4.8	8,240	C 93436
400mW versions					
4.5	2.9	6.1	0.45	50	C 93421
5	3.3	6.9	0.5	63	C 93422
6	3.9	8.2	0.6	90	C 93429
9	5.9	12.4	0.9	203	C 93423
12	7.8	16.5	1.2	360	C 93424
24	15.6	33.0	2.4	1,440	C 93425
48	31.2	66.0	4.8	5,760	C 93426
550mW versions					
4.5	2.9	6.0	0.45	36	C 93438
5	3.3	6.8	0.5	45	C 93450
6	3.9	8.1	0.6	66	C 93437
12	7.8	16.7	1.2	280	C 93432
24	15.6	32.4	2.4	1,050	C 93431
48	31.2	64.1	4.8	4,100	C 93430

### Operate Data @ 23°C

**Operate and Release Voltage:** See values in chart above.

**Operate Time (at nominal voltage):** 4 ms, typ.; 5 ms, max.

**Release Time (without diode in parallel):** 1 ms, typ.; 3 ms, max.

**Release Time (with diode in parallel):** 4 ms, typ.; 6 ms, max.

**Bounce Time (at contact close):** 1 ms, typ.; 5 ms, max.

**Maximum Switching Rate (no load):** 50 operations/s.

### Environmental Data

**Temperature Range:** -55°C to +85°C.

**Maximum Allowable Coil Temperature:** 125°C.

**Thermal Resistance:** < 125K/W.

**Shock, half sinus, 11 ms: Functional:** 50g.

**Destructive:** 100g.

**Vibration, 10-500 Hz.: Functional:** 10g.

**Needle Flame Test:** Application Time 10s.

**Resistance to Soldering:** 260°C for 10s.

### Mechanical Data

**Termination:** DIP compatible, printed circuit terminals.

**Mounting Position:** Any.

**Enclosure Type:** Immersion cleanable (IP67) plastic case.


**Weight:** 0.18 oz. (5g) approximately.



$U_l$  = Minimum voltage at 23° C after pre-energizing with nominal voltage without contact current  
 $U_H$  = Maximum continuous voltage at 23°

The operating voltage limits  $U_l$  and  $U_H$  depend on the temperature according to the formula:

$U_{l\text{amb}} = K_I \cdot U_l\text{ 23° C}$   
 and  
 $U_{H\text{amb}} = K_{II} \cdot U_H\text{ 23° C}$   
 $t_{\text{amb}}$  = Ambient temperature  
 $U_{l\text{amb}}$  = Minimum voltage at ambient temperature,  $t_{\text{amb}}$   
 $U_{H\text{amb}}$  = Maximum voltage at ambient temperature,  $t_{\text{amb}}$   
 $K_I, K_{II}$  = Factors (dependent on temperature), see diagram

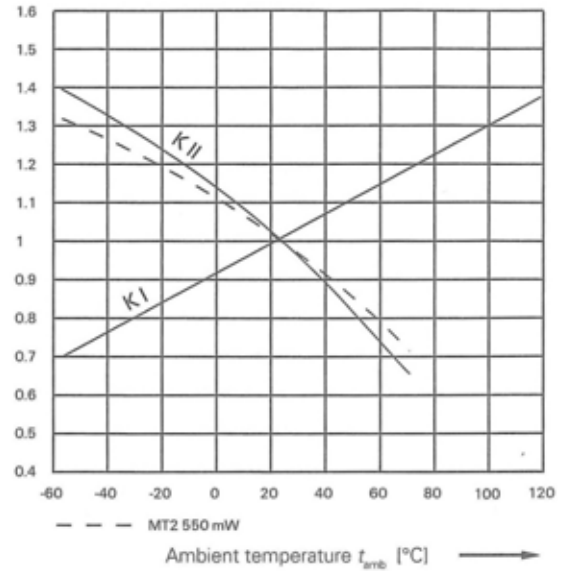

**Ordering Information**

See "Part Number" column in Coil Data chart on previous page for available part numbers in the MT2 series.


**Packaging Information**

MT2 series relays are shipped in tubes of 25. There are 500 relays in a full carton.


**Our authorized distributors are more likely to stock the following items for immediate delivery.**

None at present.


**Outline Dimensions**

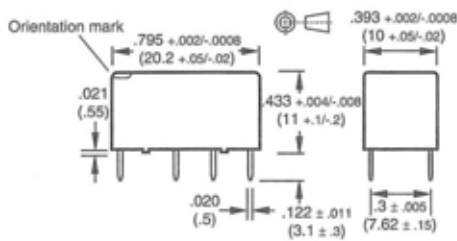

**Wiring Diagram (Bottom View)**



**PC Board Layout (Bottom View)**

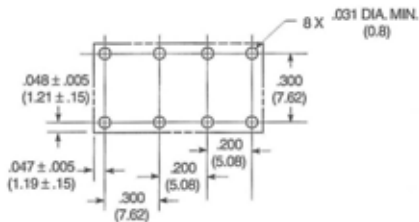

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.



# SRUUh series

## 15 Amp Miniature Power PC Board Relay

**UL** UL File No. E82292

**TUV** TUV File No. R60271

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Features

- 15 Amp switching capacity.
- 1 Form A and 1 Form C contact arrangements.
- Immersion cleanable, sealed version available.
- Applications include appliance, HVAC, security system, garage opener control, emergency lighting.

### Contact Data @ 20°C

**Arrangements:** 1 Form A (SPST-NO) and 1 Form C (SPDT).

**Material:** Silver cadmium oxide.

**Max. Switching Rate:** 300 ops./min. (no load).  
20 ops./min. (rated load).

**Expected Mechanical Life:** 10 million operations (no load).

**Expected Electrical Life:** 100,000 operations (rated load, relay vented).

**Minimum Load:** 100mA @ 5VDC.

**Initial Contact Resistance:** 100 milliohms @ 1A, 6VDC.

### Contact Ratings

**Ratings:** 15A @ 120VAC resistive,  
10A @ 240VAC resistive,  
10A @ 28VDC resistive.

**Max. Switched Voltage:** AC: 240V.  
DC: 28V.

**Max. Switched Current:** 15A.

**Max. Switched Power:** 2,400VA, 300W.

**Note:** Sealed relays should be vented after soldering and cleaning in order to achieve listed ratings.

### Initial Dielectric Strength

**Between Open Contacts:** 750VAC 50/60 Hz. (1 minute).

**Between Coil and Contacts:** 1,500VAC 50/60 Hz. (1 minute).

**Surge Voltage Between Coil and Contacts:** 3,000V (1.2 / 50µs).

### Initial Insulation Resistance

**Between Mutually Insulated Elements:** 100M ohms min. @ 500VDC.

### Coil Data

**Voltage:** 3 to 48VDC.

**Nominal Power:** 360 mW except 48VDC coil (510mW).

**Coil Temperature Rise:** 60°C max., at rated coil voltage.

**Max. Coil Power:** 130% of nominal.

**Duty Cycle:** Continuous.

### Coil Data @ 20°C

SRUUh				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
3	120	25	2.25	0.30
6	60	100	4.50	0.60
9	40	225	6.75	0.90
12	30	400	9.00	1.20
24	15	1,600	18.00	2.40
48	10	4,500	36.00	4.80

### Operate Data

**Must Operate Voltage:** 75% of nominal voltage or less.

**Must Release Voltage:** 10% of nominal voltage or more.

**Operate Time:** 15 ms max.

**Release Time:** 5 ms max.

### Environmental Data

**Temperature Range:**

**Operating:** -30°C to +60°C

**Vibration, Mechanical:** 10 to 55 Hz., 1.5mm double amplitude

**Operational:** 10 to 55 Hz., 1.5mm double amplitude.

**Shock, Mechanical:** 1,000m/s<sup>2</sup> (100G approximately).

**Operational:** 100m/s<sup>2</sup> (10G approximately).

**Operating Humidity:** 20 to 85% RH. (Non-condensing).

### Mechanical Data

**Termination:** Printed circuit terminals.

**Enclosure (94V-0 Flammability Ratings):**

**SRUUh-SS:** Vented (Flux-tight) plastic cover

**SRUUh-SH:** Sealed plastic case

**Weight:** 0.42 oz (12g) approximately.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.



## Ordering Information

Typical Part Number ▶

SRUUh -SS -1 12 D 1 M ,000

### 1. Basic Series:

SRUUh = Miniature Power PC board relay.

### 2. Enclosure:

SS = Vent (Flux-tight)\* plastic cover. SH = Sealed, plastic case.

### 3. Termination:

1 = 1 pole

### 4. Coil Voltage:

03 = 3VDC    09 = 9VDC    24 = 24VDC  
06 = 6VDC    12 = 12VDC    48 = 48VDC

### 5. Coil Input:

D = Standard

### 6. Contact Material:

1 = Silver Cadmium Oxide

### 6. Contact Arrangement:

Leave Blank = 1 Form C, SPDT    M = 1 Form A, SPST-NO

### 7. Option:


,000 = Standard model.    Other Suffix = Custom model.

\* Not suitable for immersion cleaning processes.


Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.

SRUUh-SH112D1M,000    SRUUh-SH112D1,000  
SRUUh-SH124D1M,000    SRUUh-SH124D1,000


## Outline Dimensions

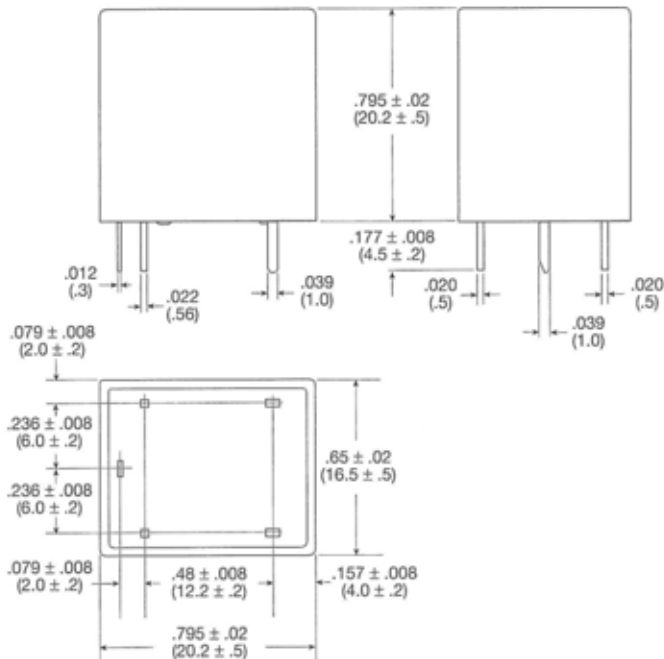

## Wiring Diagram (Bottom View)




## PC Board Layout (Bottom View)

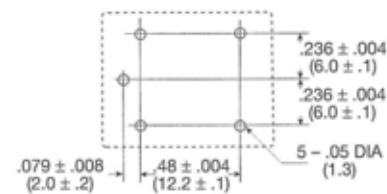

Note: Only necessary terminals are present on 1 Form A (SPST-NO) models.

## Socket

27E1064 socket is rated 10A @ 300VAC. UL Recognized for US and Canada. Designed to fit same suggested board layout as relay.

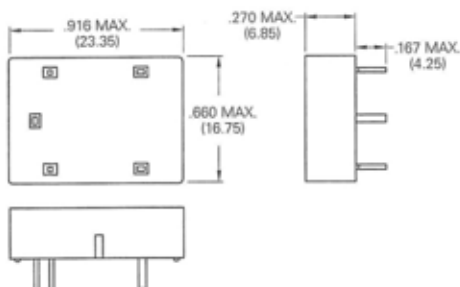

## Hold-Down Spring


20C430 spring is designed to secure SRUUh relay in 27E1064 socket.



Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.



# OUDH series

## 10 Amp Miniature, Sealed PC Board Relay

Appliances, HVAC, Office Machines.

UL File No. E58304

CSA File No. LR48471

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Features

- Low profile miniature power relay
- High density available on PC board due to small size.
- 450mW coil available.
- Meets 2kV dielectric between coil and contacts.
- Meets 5kV surge voltage.
- Immersion cleanable, sealed version available.

### Contact Data @ 20°C

**Arrangements:** 1 Form A (SPST-NO), 1 Form C (SPDT).

**Material:** Ag Alloy.

**Max. Switching Rate:** 300 ops./min. (no load).  
30 ops./min. (rated load).

**Expected Mechanical Life:** 10 million operations (no load).

**Expected Electrical Life:** 100,000 operations (rated load).

**Minimum Load:** 100mA @ 5VDC.

**Initial Contact Resistance:** 100 milliohms @ 1A, 6VDC.

### Contact Ratings

**Ratings:** 10A @ 120VAC resistive,  
10A @ 28VDC resistive,  
1/4 HP @ 120VAC.

3A @ 120VAC inductive (cosφ= 0.4),  
3A @ 28VDC inductive (L/R= 7msec).

**Max. Switched Voltage:** AC: 240V.  
DC: 110V.

**Max. Switched Current:** 10A.

**Max. Switched Power:** 1,200VA, 300W.

### Initial Dielectric Strength

**Between Open Contacts:** 750VAC 50/60 Hz. (1 minute).

**Between Coil and Contacts:** 2,000VAC 50/60 Hz. (1 minute).

**Surge Voltage Between Coil and Contacts:** 5,000V (1.2/50μs).

### Initial Insulation Resistance

**Between Mutually Insulated Elements:** 1,000M ohms min. @ 500VDCM.

### Coil Data

**Voltage:** 5 to 48VDC.

**Nominal Power:** 450mW except 48VDC coil (660mW)

**Coil Temperature Rise:** 60°C max., at rated coil voltage.

**Max. Coil Power:** 130% of nominal.

**Duty Cycle:** Continuous.

### Coil Data @ 20°C

OUDH				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
5	89.6	56	3.75	0.50
6	75.0	80	4.50	0.60
9	50.0	180	6.75	0.90
12	37.5	320	9.00	1.20
24	20.9	1,280	18.00	2.40
48	13.7	3,500	36.00	4.80

### Operate Data

**Must Operate Voltage:** 75% of nominal voltage or less.

**Must Release Voltage:** 10% of nominal voltage or more.

**Operate Time:** 10 ms max.

**Release Time:** 5 ms max.

### Environmental Data

**Temperature Range:**

**Operating:** -30°C to +60°C

**Vibration, Mechanical:** 10 to 55 Hz., 1.5mm double amplitude

**Operational:** 10 to 55 Hz., 1.5mm double amplitude.

**Shock, Mechanical:** 1,000m/s<sup>2</sup> (100G approximately).

**Operational:** 100m/s<sup>2</sup> (10G approximately).

**Operating Humidity:** 20 to 85% RH. (Non-condensing).

### Mechanical Data

**Termination:** Printed circuit terminals.

**Enclosure (94V-0 Flammability Ratings):**

**OUDH-SS:** Vented (Flux-tight), plastic cover.

**OUDH-SH:** Sealed, plastic case.

**Weight:** 0.35 oz (10g) approximately.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.



**Ordering Information**


Typical Part Number ► **OUDH -SH -1 12 D M ,000**

- 1. Basic Series:**  
OUDH = Miniature, sealed PC board relay.
- 2. Enclosure:**  
SS = Vented (Flux-tight)\* plastic cover.  
SH = Sealed, plastic case.
- 3. Termination:**  
1 = 1 pole
- 4. Coil Voltage:**  
05 = 5VDC                      09 = 9VDC                      24 = 24VDC  
06 = 6VDC                      12 = 12VDC                      48 = 48VDC
- 5. Coil Input:**  
D = Standard
- 6. Contact Arrangement:**  
Blank = 1 Form C, SPDT                      M = 1 Form A, SPST-NO
- 7. Suffix:**  
,000 = Standard model                      Other Suffix = Custom model


\* Not suitable for immersion cleaning processes.

**Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.**  
None at present.


**Outline Dimensions**

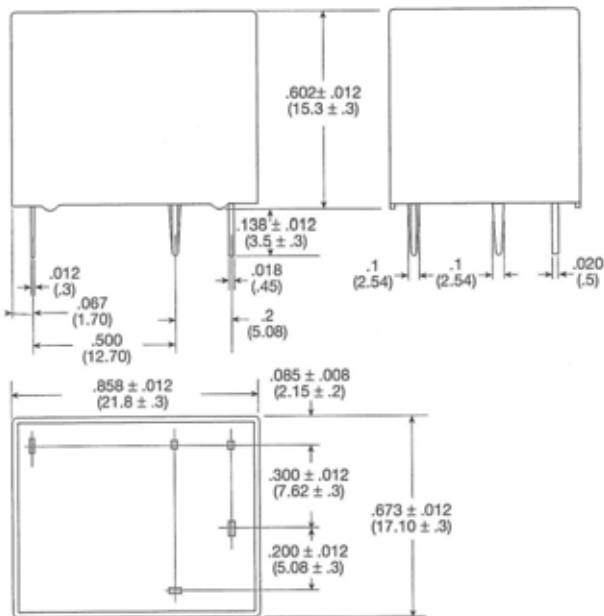

**Wiring Diagram (Bottom View)**




**PC Board Layout (Bottom View)**




**Reference Data**


**Coil Temperature Rise**

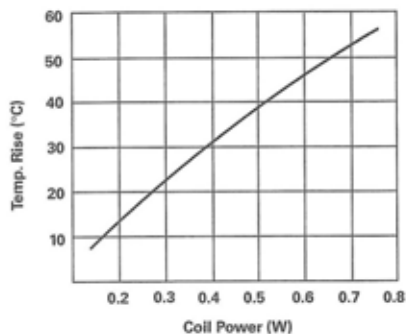

**Operate Time**

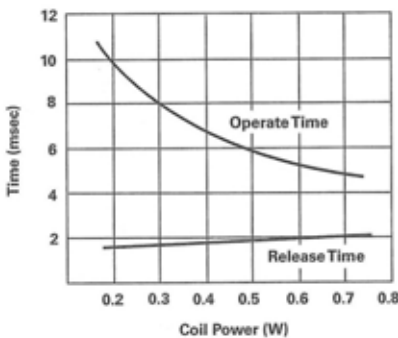

**Life Expectancy**

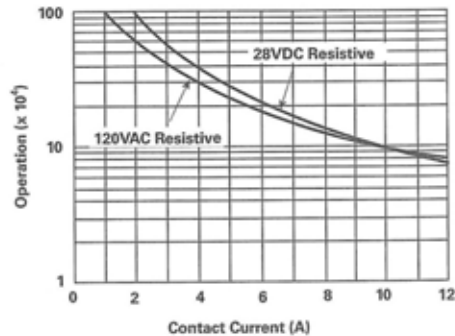


Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.





# OMI/OMIH series

## 16A Miniature Power PC Board Relay

Appliances, HVAC, Office Machines.

UL File No. E58304

CSA File No. LR48471

VDE File No. 6678

SEMKO File No. 9517235 (OMI)  
9143112 (OMIH)

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Features

- Meet UL 508, VDE0435 and SEMKO requirements.
- 1 Form A and 1 Form C contact arrangements.
- Immersion cleanable, sealed version available.
- Meet 5,000V dielectric voltage between coil and contacts.
- Meet 10,000V surge voltage between coil and contacts (1.2 / 50µs).

### Contact Data @ 20°C

**Arrangements:** 1 Form A (SPST-NO) and 1 Form C (SPDT).

**Material:** Ag Alloy (OMI), AgSnO (OMIH).

**Max. Switching Rate:** 300 ops./min. (no load),  
30 ops./min. (rated load).

**Expected Mechanical Life:** 10 million operations (no load).

**Expected Electrical Life:** 100,000 operations (rated load).

**Minimum Load:** 100mA @ 5VDC.

**Initial Contact Resistance:** 100 milliohms @ 1A, 6VDC.

### Contact Ratings

**Ratings: OMI:** 10A @ 240VAC resistive,  
10A @ 30VDC resistive,  
3A @ 240VAC inductive (cosφ= 0.4),  
3A @ 30VDC inductive (L/R=7msec).

**OMIH:** 16A @ 240VAC resistive,  
16A @ 30VDC resistive,  
4A @ 240VAC inductive (cosφ= 0.4),  
4A @ 24VDC inductive (L/R=7msec).

**Max. Switched Voltage: AC:** 250V.

**DC:** 30V.

**Max. Switched Current:** 10A (OMI), 16A (OMIH).

**Max. Switched Power: OMI:** 2,400VA, 300W.

**OMIH:** 3,800VA, 480W.

### Initial Dielectric Strength

**Between Open Contacts:** 1,000VAC 50/60 Hz. (1 minute).

**Between Coil and Contacts:** 5,000VAC 50/60 Hz. (1 minute).

**Surge Voltage Between Coil and Contacts:** 10,000V (1.2 / 50µs).

### Initial Insulation Resistance

**Between Mutually Insulated Elements:** 1,000M ohms min. @ 500VDC.

### Coil Data

**Voltage:** 5 to 48VDC.

**Nominal Power:** 720 mW (OMI-D), 540mW (OMI-L).

**Coil Temperature Rise:** 45°C max., at rated coil voltage.

**Max. Coil Power:** 130% of nominal.

**Duty Cycle:** Continuous.

### Coil Data @ 20°C

OMI/OMIH-L Sensitive				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
5	106.4	47	3.75	0.50
6	88.0	68	4.50	0.60
9	58.0	155	6.75	0.90
12	44.4	270	9.00	1.20
24	21.8	1,100	18.00	2.40
48	10.9	4,400	36.00	4.80

OMI/OMIH-D Standard				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
5	138.9	36	3.50	0.50
6	120.0	50	4.20	0.60
9	78.3	115	6.30	0.90
12	60.0	200	8.40	1.20
24	29.3	820	16.80	2.40
48	14.5	3,300	33.60	4.80

### Operate Data

**Must Operate Voltage:**

**OMI/OMIH-D:** 70% of nominal voltage or less.

**OMI/OMIH-L:** 75% of nominal voltage or less.

**Must Release Voltage:** 5% of nominal voltage or more.

**Operate Time: OMI/OMIH-D:** 15 ms max.

**OMI/OMIH-L:** 20 ms max.

**Release Time:** 8 ms max.

### Environmental Data

**Temperature Range:**

**Operating: OMI/OMIH-D:**

-30°C to +55°C

**OMI/OMIH-L:**

-30°C to +70 °C

**Vibration, Mechanical:** 10 to 55 Hz., 1.5mm double amplitude

**Operational:** 10 to 55 Hz., 1.5mm double amplitude.

**Shock, Mechanical:** 1,000m/s<sup>2</sup> (100G approximately).

**Operational:** 100m/s<sup>2</sup> (10G approximately).

**Operating Humidity:** 20 to 85% RH. (Non-condensing).

### Mechanical Data

**Termination:** Printed circuit terminals.

**Enclosure (94V-0 Flammability Ratings):**

**OMI/OMIH-SS:** Vented (Flux-tight) plastic cover.

**OMI/OMIH-SH:** Sealed plastic case.

**Weight:** 0.46 oz (13g) approximately.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.



## Ordering Information

Typical Part Number ▶

OMIH -SH -1 24 L ,294

### 1. Basic Series:

OMI = 10A rating      OMIH = 16A rating

### 2. Enclosure:

SS = Vent (Flux-tight)\* plastic cover.  
SH = Sealed, plastic case.

### 3. Termination:

1 = 1 pole

### 4. Coil Voltage:

05 = 5VDC      09 = 9VDC      24 = 24VDC  
06 = 6VDC      12 = 12VDC      48 = 48VDC

### 5. Coil Input:

D = Standard (720mW)      L = Sensitive (540mW)

### 6. Contact Arrangement:

Blank = 1 Form C, SPDT      M = 1 Form A, SPST-NO


### 7. Suffix:

,300 = Standard model for "SS" enclosure      ,394 = Standard model for "SH" enclosure      Other Suffix = Custom model

Our authorized distributors are more likely to stock the following items for immediate delivery.

OMIH-SH-105D,394    OMIH-SH-105L,394  
OMIH-SH-112D,394    OMIH-SH-112L,394  
OMIH-SH-124D,394    OMIH-SH-124L,394


## Outline Dimensions

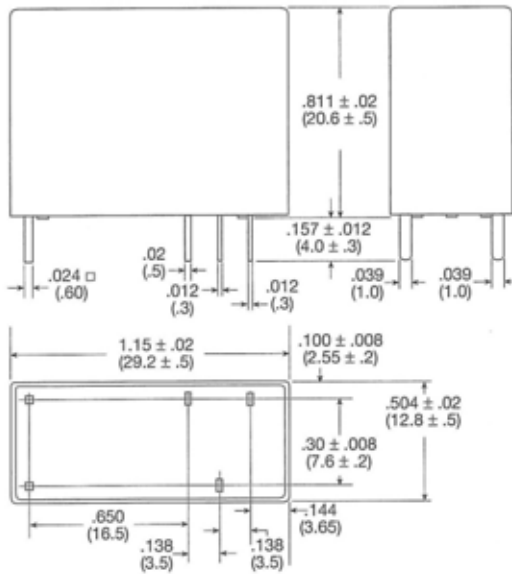

## Wiring Diagram (Bottom View)




## PC Board Layout (Bottom View)

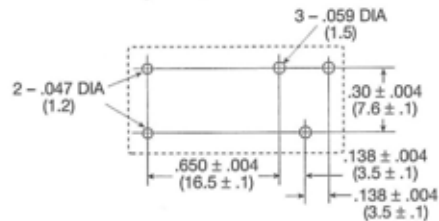


## Reference Data


### Coil Temperature Rise

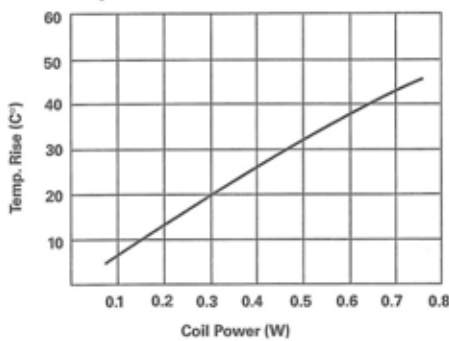

### Operate Time

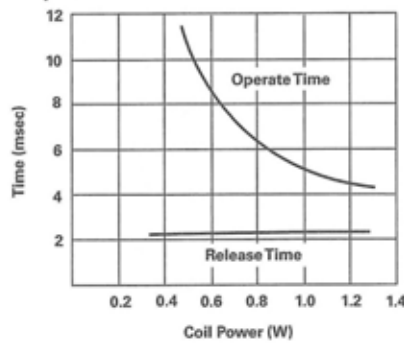

### Life Expectancy

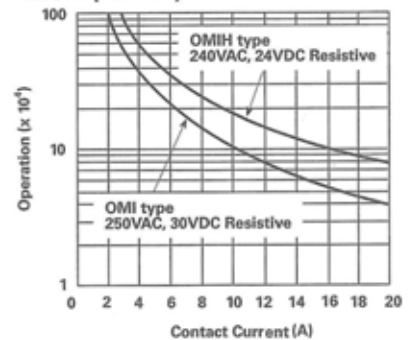

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.

# OMI 2 Pole series

## 2 Pole Miniature Power PC Board Relay


Appliances, HVAC, Office Machines.

UL File No. E58304

CSA File No. LR48471

VDE File No. 6678

SEMKO File No. 9517235

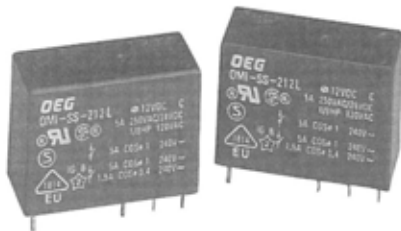

### Features

- Meet UL 508, VDE0435 and SEMKO requirements.
- 2 Form A and 2 Form C contact arrangements.
- Immersion cleanable, sealed version available.
- Meet 5,000V dielectric voltage between coil and contacts.
- Meet 10,000V surge voltage between coil and contacts (1.2 / 50µs).

### Contact Data @ 20°C

Arrangements: 2 Form A (DPST-NO) and 2 Form C (DPDT).

Material: Ag Alloy.

Max. Switching Rate: 300 ops./min. (no load).  
30 ops./min. (rated load).

Expected Mechanical Life: 10 million operations (no load).

Expected Electrical Life: 100,000 operations (rated load).

Minimum Load: 100mA @ 5VDC.

Initial Contact Resistance: 100 milliohms @ 1A, 6VDC.

### Contact Ratings

Ratings: 5A @ 240VAC resistive,  
5A @ 120VAC resistive,  
5A @ 30VDC resistive,  
1/8 HP @ 250VAC.

1.5A @ 240VAC inductive (cosφ= 0.4),  
1.5A @ 120VAC inductive (cosφ= 0.4),  
1.5A @ 24VDC inductive (L/R=7msec).

Max. Switched Voltage: AC: 240V.

DC: 30V.

Max. Switched Current: 5A.

Max. Switched Power: OMI: 1,200VA, 150W.

### Initial Dielectric Strength

Between Open Contacts: 1,000VAC 50/60 Hz. (1 minute).

Between Coil and Contacts: 5,000VAC 50/60 Hz. (1 minute).

Surge Voltage Between Coil and Contacts: 10,000V (1.2 / 50µs).

### Initial Insulation Resistance

Between Mutually Insulated Elements: 1,000M ohms min. @ 500VDCM.

### Coil Data

Voltage: 5 to 48VDC.

Nominal Power: 720mW (OMI-D), 540mW (OMI-L).

Coil Temperature Rise: 45°C max., at rated coil voltage.

Max. Coil Power: 130% of nominal.

Duty Cycle: Continuous.

### Coil Data @ 20°C

OMI-L Sensitive				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
5	106.4	47	4.00	0.50
6	88.0	68	4.80	0.60
9	58.0	155	7.20	0.90
12	44.4	270	9.60	1.20
24	21.8	1,100	19.20	2.40
48	10.9	4,400	38.40	4.80
OMI-D Standard				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
5	138.9	36	3.75	0.50
6	120.0	50	4.50	0.60
9	78.3	115	6.75	0.90
12	60.0	200	9.00	1.20
24	29.3	820	18.00	2.40
48	14.5	3,300	36.00	4.80

### Operate Data

Must Operate Voltage:

OMI-D: 75% of nominal voltage or less.

OMI-L: 80 % of nominal voltage or less.

Must Release Voltage: 5% of nominal voltage or more.

Operate Time: OMI-D: 15 ms max.

OMI-L: 20 ms max.

Release Time: 8 ms max.

### Environmental Data

Temperature Range:

Operating: OMI-D:

-30°C to +55°C

OMI-L:

-30°C to +70 °C

Vibration, Mechanical: 10 to 55 Hz., 1.5mm double amplitude

Operational: 10 to 55 Hz., 1.5mm double amplitude.

Shock, Mechanical: 1,000m/s<sup>2</sup> (10G approximately).

Operational: 100m/s<sup>2</sup> (10G approximately).

Operating Humidity: 20 to 85% RH. (Non-condensing).

### Mechanical Data

Termination: Printed circuit terminals.

Enclosure (94V-0 Flammability Ratings):

OMI-SS: Vented (Flux-tight) plastic cover.

OMI-SH: Sealed plastic case.

Weight: 0.46 oz (13g) approximately.

Dimensions are shown for reference purposes only.


Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.







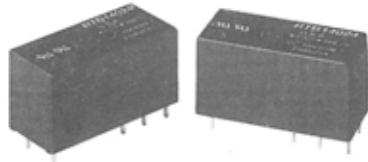

# RT series (DC Coil) 16 Amp PC Board Miniature Relay

- File E22575
- File LR15734
- NR 6106

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

## Features

- SPST through DPDT contact arrangements.
- Immersion cleanable and flux tight versions available.
- VDE 10mm spacing, 5kV dielectric, coil to contacts.
- UL Class F (155°C) coil insulation system.
- Conforms to UL 508, 1873, 353 and 1950.
- Low profile; 15.7mm height.
- Sensitive coil; 400mW.
- Withstand surge voltage of 10,000V.
- Potter & Brumfield or Schrack brand.

## Contact Data

**Arrangements:** 1 Form A (SPST-NO) Wiring Diagram Code 1, 2,3.  
2 Form A (DPST-NO) Wiring Diagram Code 5.  
1 Form C (SPDT) Wiring Diagram Code 1, 2, 3.  
2 Form C (DPDT) Wiring Diagram Code 5.

**Material:** Silver-nickel 90/10.

**Minimum Load:** 12V/100mA.

**Expected Mechanical Life:** 10 million operations.

**Initial Contact Resistance:** 100 milliohms max @ 1A 12VDC.

**Designed to meet UL/CSA/VDE ratings with relay properly vented. Remove vent nib after soldering and cleaning.**

## UL/CSA/VDE Ratings @ 25°C

Code	NO/NC Load	Type	Operations
1	10A/10A @ 277VAC	Resistive/GP	100K
	10A/10A @ 30VDC	Resistive	100K
	12A/12A @ 250VAC	Resistive/GP	30K
	12A/12A @ 30VDC	Resistive	30K
	3/4 HP @ 480VAC*	Motor	6K
	1/2 HP @ 240VAC*	Motor	6K
	1/3 HP @ 120VAC*	Motor	6K
	48 LRA/10 FLA @ 240VAC*	Motor	30K
	TV-3 @ 120VAC*	Tungsten	25K
	A300, 720VA @ 240VAC*	Pilot Duty	30K
3	16A/16A @ 250VAC	Resistive/GP	50K
	20A/20A @ 277VAC	Resistive/GP	30K
	20A/20A @ 24VDC	Resistive	30K
	16A/16A @ 30VDC	Resistive	30K
	1 HP @ 480VAC*	Motor	6K
	1 HP @ 240VAC*	Motor	6K
	1/2 HP @ 120VAC*	Motor	6K
	60 LRA/10 FLA @ 250VAC*	Motor	30K
	TV-5 @ 120VAC*	Tungsten	25K
	A300, 720VA @ 240VAC*	Pilot Duty	30K
B300, 360VA @ 240VAC**	Pilot Duty	30K	
5	8A/8A @ 277VAC	Resistive/GP	100K
	8A/8A @ 30VDC	Resistive	100K
	10A/10A @ 250VAC	Resistive/GP	30K
	10A/10A @ 30VDC	Resistive	30K
	1/2 HP @ 240VAC*	Motor	6K
	1/4 HP @ 120VAC*	Motor	6K
	34.8 LRA/6 FLA @ 120VAC*	Motor	30K
	17.4 LRA/5 FLA @ 240VAC*	Motor	30K
	B300, 360VA @ 240VAC*	Pilot Duty	30K
	TV-3 @ 120VAC*	Tungsten	25K

\* Form A only

\*\* Form B only

## Initial Dielectric Strength

**Between Open Contacts:** >1,000VAC (1 minute).

**Between Poles (code 5):** >2,500VAC (1 minute).

**Between Coil and Contacts:** >5,000VAC (1 minute).

**Surge Voltage (DC):** >10,000VAC x (1.2 x 50 µsec).

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

## Coil Data @ 25°C

**Voltage:** 5 to 110VDC.

**Nominal Power @ 25°C:** 400mW.

**Duty Cycle:** Continuous.


**Initial Insulation Resistance:** 10,000 megohms, min., at 25°C, 500VDC and 50% rel. humidity.

**Coil Construction:** UL Class F (155°C).

## Coil Data @ 25°C

Nominal Voltage VDC	DC Resistance in Ohms ±10%	Must Operate Voltage VDC	Nominal Coil Current (mA) – 50/60Hz.
005	62	3.5	80
006	90	4.2	66.7
009	202	6.3	44.4
012	360	8.4	33.3
018	810	12.6	22.2
024	1,440	16.8	16.7
048	5,760	33.6	8.3
060	9,000	42.0	8.0
110	30,250	77.0	4.3

## Max. Ambient Temp. vs. Coil Voltage

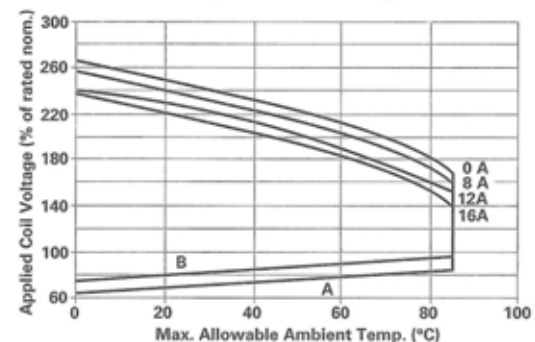

A: Coil temperature = Ambient temperature.

B: 110% of nominal coil voltage at rated contact load.

## Operate Data @ 25°C

**Must Operate Voltage(DC):** 70% of nominal.

**Must Release Voltage(DC):** 10% of nominal.

**Operate Time (Excluding Bounce):**

7 ms, typ., 15ms max. at nom. voltage.

**Release Time (Excluding Bounce):**

3 ms, typ., 6ms max. at nom. voltage.

## Environmental Data

**Temperature Range:**

**Storage:** -40°C to +105°C.

**Operating:** -40°C to +85°C at rated current.

**Vibration, Operational**

N.O.:0.065" (1.65mm) max. excursions from 10 - 55 Hz:

N.C.:0.032" (0.82mm) max. excursions from 10 - 55 Hz:

with no contact opening >10µs.

## Mechanical Data

**Termination:** Printed circuit terminals.

**Enclosures:** RT 1, 2, 3, 4: Flux-tight, top vented, plastic case.

RT B, C, D, E: Immersion cleanable, plastic case.

**Weight:** 0.35 oz. (10g) approximately.

Specifications and availability subject to change.




## Ordering Information (DC Coil Models)

Typical Part Number ▶	RT	B	3	4	012	F
<b>1. Basic Series:</b> RT = Miniature, printed circuit board relay.						
<b>2. Enclosure:</b> 1 = 1 pole 12A, Pinning 3.5mm, flux-tight (Code 1).      B = 1 pole 12A, Pinning 3.5mm, sealed (Code 1). 2 = 1 pole 12A, Pinning 5mm, flux-tight (Code 2).      C = 1 pole 12A, Pinning 5mm, sealed (Code 2). 3 = 1 pole 16A, Pinning 5mm, flux-tight (Code 3).      D = 1 pole 16A, Pinning 5mm, sealed (Code 3). 4 = 2 pole 8A, Pinning 5mm, flux-tight (Code 5).      E = 2 pole 8A, Pinning 5mm, sealed (Code 5).						
<b>3. Contact Arrangement:</b> 1 = 1 Form C (SPDT) (Requires wiring diagram codes 1, 2 or 3.) 2 = 2 Form C (DPDT) (Requires wiring diagram code 5.) 3 = 1 Form A (SPST-NO) (Requires wiring diagram codes 1, 2 or 3.) 4 = 2 Form A (DPST-NO) (Requires wiring diagram code 5.)						
<b>4. Contact Material:</b> 4 = Silver-nickel 90/10 (standard stock).						
<b>5. Coil Voltage:</b> 005 = 5VDC      009 = 9VDC      018 = 18VDC      048 = 48VDC      110 = 110VDC 006 = 6VDC      012 = 12VDC      024 = 24VDC      060 = 60VDC						
<b>5. Coil Insulation Classification, Brand and Case Color</b> F = UL Class F, Potter & Brumfield Brand, Black Case      Leave Blank = UL Class F, Schrack Brand, Orange Case						


Our authorized distributors are more likely to stock the following items for immediate delivery.

RT114012F   RTB14012F   RTB34024F   RTD14005F   RTD34012F   RTE24005F   RTE44012F  
 RT114024F   RTB14024F   RT314012F   RTD14012F   RT424012F   RTE24012F   RTE44024F  
 RTB14005F   RTB34012F   RT314024F   RTD14024F   RT424024F   RTE24024F

### Outline Dimensions

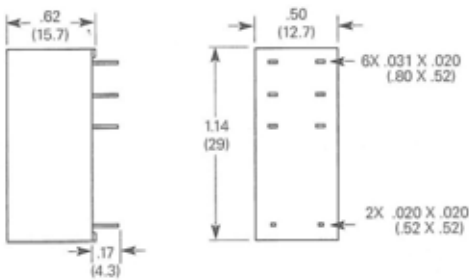


### Breaking Capacity

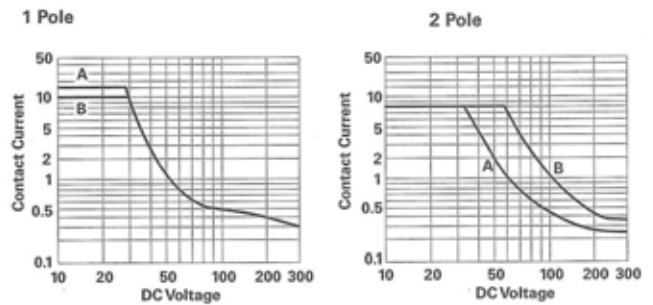

A: 16A Version.  
B: 12A Version.


A: 1 Contact.  
B: 2 Contacts in series.

### PC Board Layouts (Bottom View)

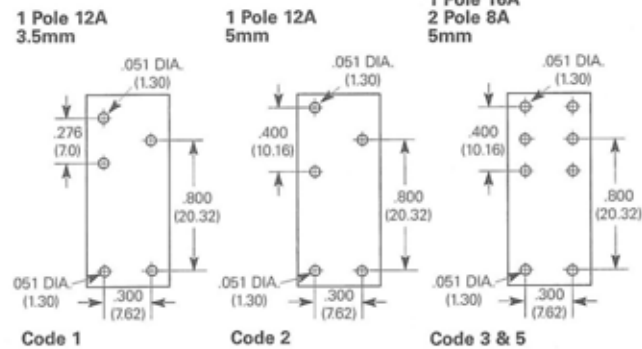


Notes: 1. On single throw models, only necessary terminals are present.  
 2. With the recommended PCB hole sizes, a grid with a pattern from 0.0984 to 0.1 in (2.5 - 2.54 mm) can be used.

### Contact Life for Resistive AC Load (Typical)

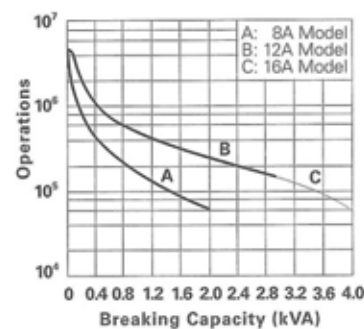

Note: Data from 250VAC @ 70°C.

### Wiring Diagrams (Bottom View)

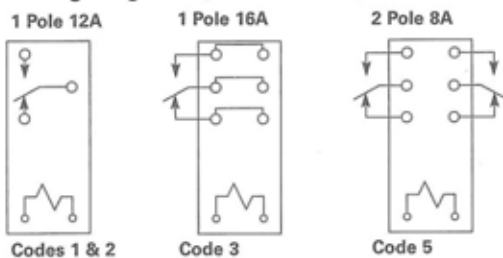


Note: On single throw models, only necessary terminals are present.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.

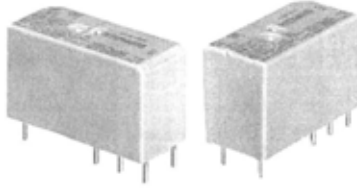

# RT series (AC Coil)

## 16 Amp Miniature Printed Circuit Board Relay

File E214025  
NR 6106

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Features

- SPST through DPDT contact arrangements.
- Immersion cleanable and flux tight versions available.
- Meets VDE 10mm spacing, 5kV dielectric, coil to contacts.
- Conforms to UL 508, 1873 and 353.
- UL Class F (155°C) coil construction
- Schrack brand

### Contact Data

**Arrangements:** 1 Form A (SPST-NO) Wiring Diagram Code 1, 2, 3.  
2 Form A (DPST-NO) Wiring Diagram Code 5.  
1 Form C (SPDT) Wiring Diagram Code 1, 2, 3.  
2 Form C (DPDT) Wiring Diagram Code 5.

**Material:** Silver-nickel 90/10.

**Minimum Load:** 12V/100mA.

**Expected Mechanical Life:** 10 million operations.

Designed to meet UL/CSA/VDE ratings with relay properly vented. Remove vent nib after soldering and cleaning.

### UL/CSA Ratings @ 25°C:

Code	NO/NC Load	Type	Operations
1	12A NO @ 240VAC	GP	30K
	10A/5A @ 240VAC	Resistive/GP	100K
	8A @ 28VDC	Resistive	30K
	1 HP @ 240VAC*	Motor	6K
	1/2 HP @ 120VAC*	Motor	6K
3	8A @ 28VDC*	Resistive	30K
	B300	Pilot Duty	6K
	16A/8A @ 240VAC	GP	6K
	8A @ 28VDC	Resistive	30K
	1/2 HP @ 120VAC*	Motor	6K
5	1HP @ 240VAC*	Motor	6K
	48 LRA, 8 FLA @ 240VAC	Motor	30K
	B300	Pilot Duty	6K
	8A @ 240VAC	Resistive	30K
	8A @ 28VDC	Resistive/GP	30K
	1/2 HP @ 240VAC	Motor	6K
	1/4 HP @ 120VAC	Motor	6K
	B300	Pilot Duty	6K
	B300	Pilot Duty	6K

\* Form A only

### VDE Ratings @ 25°C:

Code	NO/NC Load	Type	Operations
1	12A @ 250VAC	Resistive	30K
	12A @ 250VAC	Resistive	100K
3	16A @ 250VAC	Resistive	10K
	16A @ 250VAC	Resistive	50K
5	8A @ 250VAC	Resistive	30K
	8A @ 250VAC	Resistive	50K

### Initial Dielectric Strength

**Between Open Contacts:** >1,000VAC (1 minute).  
**Between Poles (code 5):** >2,500VAC (1 minute).  
**Between Coil and Contacts:** >5,000VAC (1 minute).  
**Creepage/Clearance, Coil to Contact:** 10/10mm.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

### Coil Data @ 20°C

**Voltage:** 24, 115, 230VAC (consult factory for availability of other voltages).

**Nominal Power @ 25°C:** .75VA.

**Duty Cycle:** Continuous.


**Initial Insulation Resistance:** 10,000 megohms, min., at 20°C, 500VDC and 50% rel. humidity.

**Coil Construction:** UL Class F (155°C).

### Coil Data

Nominal Voltage VAC	DC Resistance in Ohms ±10%	Must Operate Voltage VAC	Drop-out Voltage VAC	Nominal Coil Current (mA)-50Hz.	Nominal Coil Current (mA)-60Hz.
24	350	18.0	3.6	31.6	24.3
115	8,100	86.3	17.3	6.6	5.1
230	32,500	172.5	34.5	3.3	2.3

### Max. Ambient Temp. vs. Coil Voltage

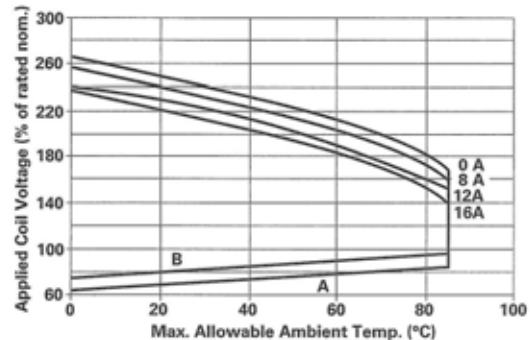

A: Coil temperature = Ambient temperature.

B: 110% of nominal coil voltage at rated contact load.

### Operate Data

**Must Operate Voltage:** See coil data.

**Operate Time (Excluding Bounce):** 8 ms, typ., at nom. voltage.

**Release Time (Excluding Bounce):** 11 ms, typ., at nom. voltage.

### Environmental Data

**Temperature Range:**

**Storage:** -40°C to +105°C.

**Operating:** -40°C to +70°C at rated current.

**Vibration:** 30 - 150 Hz:

at 20g with no contact opening >10µs on the N.O. contact;  
at 5g with no contact opening >10µs on the N.C. contact.

### Mechanical Data

**Termination:** Printed circuit terminals.

**Enclosures:** RT 1, 2, 3, 4: Flux-tight, top vented, plastic case.

RT B, C, D, E: Immersion cleanable, plastic case.

**Weight:** 0.42 oz. (12g) approximately.

Specifications and availability subject to change.



**Ordering Information (AC Coil Model)**


Typical Part Number ▶	<b>RT</b>	<b>D</b>	<b>1</b>	<b>4</b>	<b>524</b>
<p><b>1. Basic Series:</b> RT = Miniature, printed circuit board relay.</p> <p><b>2. Enclosure:</b>                  1 = 1 pole 12A, Pinning 3.5mm, flux-tight (Code 1).    B = 1 pole 12A, Pinning 3.5mm, sealed (Code 1).                  2 = 1 pole 12A, Pinning 5mm, flux-tight (Code 2).    C = 1 pole 12A, Pinning 5mm, sealed (Code 2).                  3 = 1 pole 16A, Pinning 5mm, flux-tight (Code 3).    D = 1 pole 16A, Pinning 5mm, sealed (Code 3).                  4 = 2 pole 8A, Pinning 5mm, flux-tight (Code 5).    E = 2 pole 8A, Pinning 5mm, sealed (Code 5).</p> <p><b>3. Contact Arrangement:</b>                  1 = 1 Form C (SPDT) (Requires wiring diagram codes 1, 2 or 3.)                  2 = 2 Form C (DPDT) (Requires wiring diagram code 5.)                  3 = 1 Form A (SPST-NO) (Requires wiring diagram codes 1, 2 or 3.)                  4 = 2 Form A (DPST-NO) (Requires wiring diagram code 5.)</p> <p><b>4. Contact Material:</b>                  4 = Silver-nickel 90/10.</p> <p><b>5. Coil Voltage:</b>                  524 = 24VAC    615 = 115VAC    730 = 230VAC</p>					

**Note:** All AC coil model RT part numbers are Schrack brand, are orange in color and have UL Class F (155°C) coil construction.

**Our authorized distributors are more likely to stock the following items for immediate delivery.**


RTB14524    RTD14524    RTE24524  
 RTB14615    RTD14615    RTE24615  
 RTB14730    RTD14730    RTE24730

**Outline Dimensions**

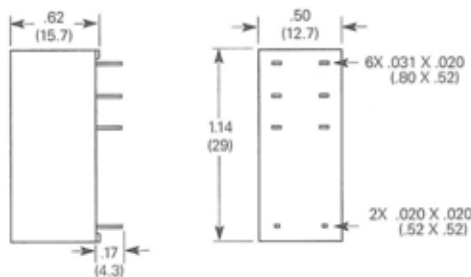


**Breaking Capacity**

**1 Pole**




**2 Pole**



A: 16A Version.  
 B: 12A Version.


A: 1 Contact.  
 B: 2 Contacts in series.

**PC Board Layouts (Bottom View)**

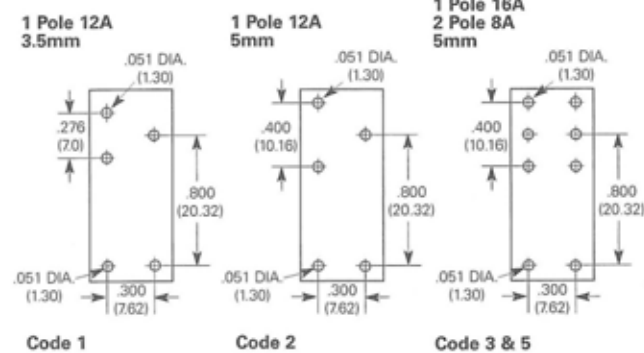


**Notes:**  
 1. On single throw models, only necessary terminals are present.  
 2. With the recommended PCB hole sizes, a grid with a pattern from 0.0984 to 0.1 in (2.5 - 2.54 mm) can be used.

**Contact Life for Resistive AC Load (Typical)**

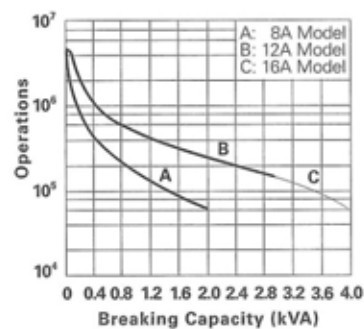

**Note:** Data from 250VAC @ 70°C.

**Wiring Diagrams (Bottom View)**

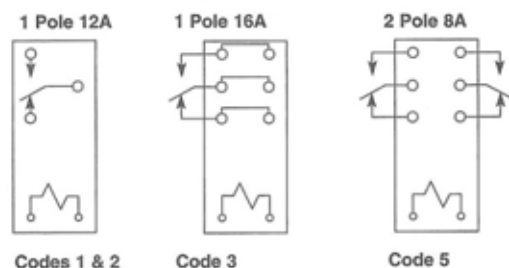


**Note:** On single throw models, only necessary terminals are present.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.



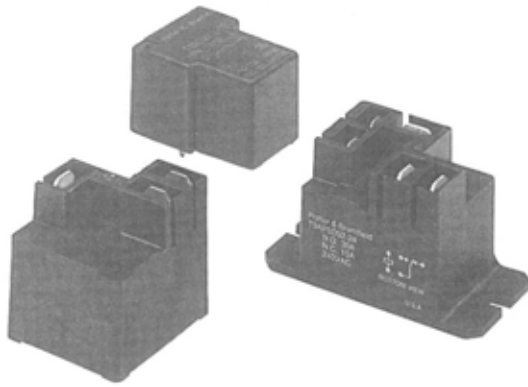

## T9A series

### DC Coil 30 Amp PC Board or Panel Mount Relay

File E22575

File LR15734

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

#### Features

- Up to 30 amp switching in SPST and 20 amp in SPDT arrangements.
- Immersion cleanable<sup>(6)</sup>, plastic sealed case available.
- Meets UL 873 and UL 508 spacing – 1/8" through air, 1/4" over surface.
- Load connections made via 1/4" Q. C. terminals and safety wells accept insulated female Q. C. terminals (mounting codes 2 & 5).
- UL Class F insulation system standard.
- Well suited for various industrial, commercial and residential applications.

#### Contact Ratings @ 25°C

**Arrangements:** 1 Form A (SPST-NO), and 1 Form C (SPDT).

**Material:** Silver-cadmium oxide.

**Mechanical Life:** 10 million operations, typical.

**Minimum Contact Load:** 1A @ 5VDC or 12VAC.

**Initial Contact Resistance:** 75 milliohms, max., @ min. rated current (switched).

**Contact Ratings @ 25°C (unless otherwise noted) with relay properly vented. Remove vent nib after soldering and cleaning.**

#### Typical Electrical Load & Life - 1 Watt Coil

Contact Arrangement	Contact Load	Type of Load	Operations
1	30A @ 240VAC	UL General Purpose	100,000
	25A @ 240VAC	Resistive Heater	100,000
5	20A/10A @ 240VAC	UL General Purpose	100,000
	20A/10A @ 240VAC	UL Resistive	100,000
	20A/10A @ 28VDC	Resistive	100,000

#### UL 508/873 & CSA Contact Ratings - 900mW Coil

Voltage	Load Type	N.O. Contact	N.C. Contact	Operations
240VAC	General Purpose	30A	-	100,000
240VAC	Resistive	18A	-	100,000 @ 105°C
240VAC	Resistive	-	15A	6,000
240VAC	LRA/FLA	30A/15A	-	100,000
120VAC	LRA/FLA	50A/16A	-	100,000
120VAC	LRA/FLA	30A/11A	-	200,000

Note: Consult factory for other 900mW version contact ratings.

#### UL 508/873 & CSA Contact Ratings - 1 Watt Coil

Voltage	Load Type	N.O. Contact	N.C. Contact
277VAC	Tungsten *	5.4A	-
277VAC	Ballast	10A	3A
240VAC	Motor	2 HP	1/2 HP
240VAC	Resistive *†	25A	20A
240VAC	General Purpose†	30A	15A
240VAC	LRA/FLA **††	80A/30A	30A/12A
240VAC	Pilot Duty *	470VA	275VA
125VAC	Motor	1 HP	1/4 HP
120VAC	LRA/FLA	98A/22A	-
120VAC	Tungsten *	8.3A	-
120VAC	Pilot Duty	470VA	-
28VDC	Resistive	20A	10A

\* Rated 6,000 operations.

\*\* Higher UL & CSA ratings available.

† For Form C application, derate current to 20A (N.O.), 10A (N.C.).

†† For Form C application, derate current to 67%.

Note: Consult factory for other 900mW version contact ratings.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.

#### Initial Dielectric Strength

**Between Open Contacts:** 1,500V rms.

**Between Contacts and Coil:** 2,500V rms.

6 kV surge using 1.2µs/50µs Impulse Wave or .5µs – 100kHz Ring Wave

#### Initial Insulation Resistance

**Between Mutually Insulated Elements:** 10<sup>9</sup> ohms, min., @ 500VDC, 25°C and 50% R.H.

#### Coil Data @ 25°C

**Voltage:** 5 to 110VDC.

**Nominal Coil Power:** 1.0W, (approx.) and 900mW (approx.) versions.

**Maximum Coil Power:** 2.8 Watt.

**Maximum Coil Temperature<sup>(5)</sup>:** Class F: 155°C.

**Duty Cycle:** Continuous.

#### Coil Data - 1 Watt

Nominal Voltage	DC Resistance ± 10% (Ohms)	Nominal Current (mA)
5	25	200
9	81	111
12	144	83
18	324	56
24	576	42
48	2,304	21
110	12,100	9

#### Coil Data - 900mW

Nominal Voltage	DC Resistance ± 10% (Ohms)	Nominal Current (mA)
5	27	185
9	97	93
12	155	77
18	380	47
24	660	36
48	2,560	19
110	13,450	8

#### Operate Data @ 25°C

**Must Operate Voltage:** 75% of nominal voltage or less.

**Must Release Voltage:** 10% of nominal voltage or more.




**Operate Time (Including Bounce)§:** 15 ms, max.

**Release Time (Including Bounce)§:** 15 ms, max.

§ At or From Nominal Coil Voltage

### Ambient Temperature vs. Coil Voltage - 1 Watt Coil

Data below are average values and should be verified in application. Tests were conducted within a 2' (.6 m) cube (still air); at nominal coil power @ 25°C; with normally open contact loaded; and with 4' (1.22 m) long, #10 AWG load wires. P.C. board relays were mounted to a 30A, single side P.C. board (6).

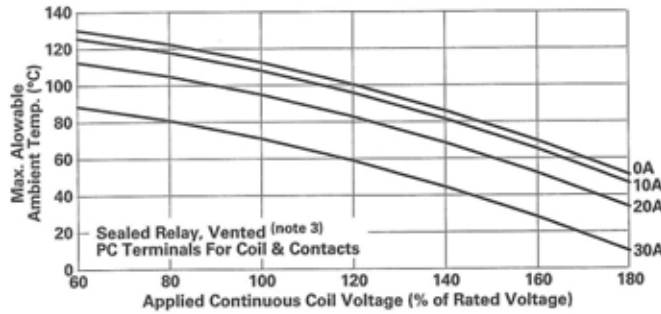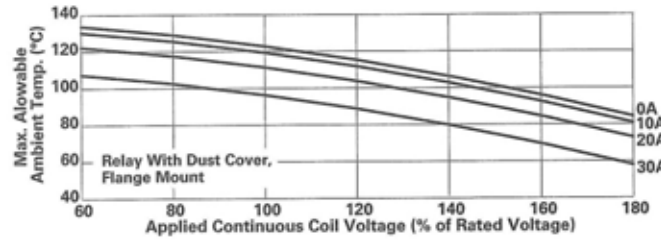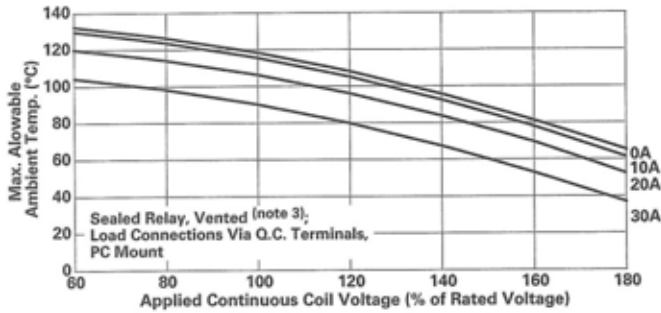

### Environmental Data

**Storage Temperature Range:** -55°C to 130°C.  
**Operating Temperature Range(1):** -55°C to +85°C.  
**Vibration, Operational:** 0.065" (1.65mm) max. excursions from 10-55 Hz. with no contact opening >100µs.  
**Shock, Operational:** 10g for 11 ms with no contact opening >100µs.  
**Shock, Mechanical:** 100g.

### Mechanical Data

**Termination:** Printed circuit and quick connect terminals (4).  
**Enclosures (all have 94V-0 flammability rating):**  
**T9AP:** Unsealed, plastic dust cover.  
**T9AS:** Immersion cleanable, sealed plastic case (2 & 3).  
**T9AV:** Vented, flux-tight, plastic cover.  
**Weight: Q.C. version:** 1.2 oz. (33g) approx. (mounting code 2 & 5).  
**Sealed Model T9AS:** 0.9 oz. (26g) approx. (mounting code 1).

### Notes

- (1) Operating ambient temperature must consider "Must Operate Voltage Change Over Temperature," Contact Temperature Rise, Coil Temperature Rise (if coil is not allowed to cool) and Maximum Coil Temperature. Specification ambient considers 20A load with coil cooled to ambient.
- (2) Sealed relay terminals should not be bent.
- (3) Remove knock-off nib after cleaning process for optimum life of sealed relays.
- (4) Maximum soldering temperature is 500°F for 4 seconds.
- (5) Class F coils are UL systems approved for maximum coil temperature of 140°C, by change of resistance method.
- (6) See application note 13C265 for proper relay mounting, termination, cleaning and PC board conductor width. Coil rise test performed with 30A PC board to maintain 20°C maximum rise @ 30A.

### Ordering Information

Typical Part Number ► **T9A S 5 D 2 2 -12**

- 1. Basic Series:**  
T9A = Low cost, printed circuit board/panel power relay.
- 2. Enclosure:**  
P = Unsealed, plastic dust cover (mounting code 5).  
S = Immersion cleanable, knock off nib, sealed plastic case (mounting codes 1 & 2).  
V = Vented, flux-tight (mounting code 1).
- 3. Contact Arrangement:**  
1 = 1 Form A (SPST-NO). 5 = 1 Form C (SPDT).
- 4. Coil Input:**  
D = DC voltage (1 Watt) L = DC voltage (900mW)
- 5. Mounting & Termination:**  
1 = Printed circuit board mounting; PC terminals for coil & contacts (a).  
2 = Printed circuit board mounting; PC terminals for coil & contacts, and .250" (6.35mm) quick connects for contacts (b).  
5 = Flanged mounting; .187" (4.75mm) quick connects for coil and .250" (6.35mm) quick connects for contacts (c).
- 6. Contact Material:**  
2 = Silver-cadmium oxide.
- 7. Coil Voltage:**  
5 = 5VDC 12 = 12VDC 24 = 24VDC 110 = 110VDC  
9 = 9VDC 18 = 18VDC 48 = 48VDC

a) Only available with enclosure code "S" & "V". b) Only available with enclosure code "S". c) Only available with enclosure code "P".

**Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.**

T9AP1D52-9	T9AS1D12-24	T9AS5D22-12
T9AP1D52-12	T9AS1D12-48	T9AS5D22-24
T9AP5D52-12	T9AS1D22-12	T9AV1L22-24
T9AP5D52-24	T9AS1D22-24	
T9AS1D12-12	T9AS5D12-12	
T9AS1D12-18	T9AS5D12-24	

Dimensions are shown for reference purposes only.


Dimensions are in inches over (millimeters) unless otherwise specified.

Specifications and availability subject to change.




**Outline Dimensions**

**T9AS – Mounting & Termination Code 2**

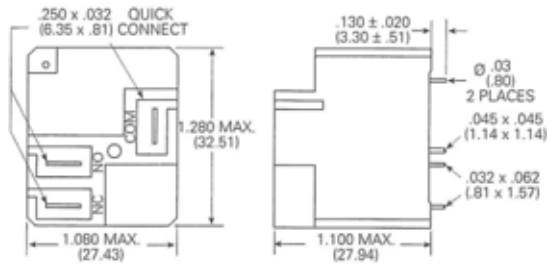


**T9AP – Mounting & Termination Code 5**

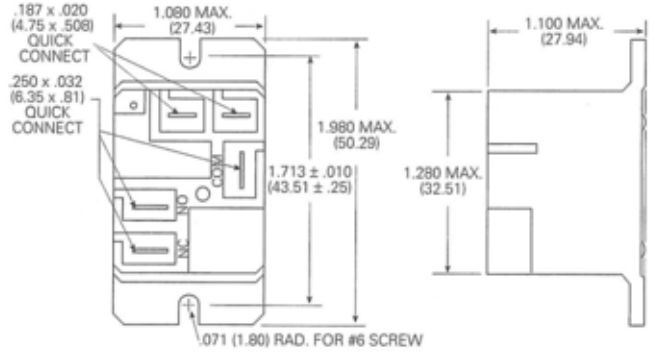

**Note:** Recommended mounting screw torque is 4.0-5.0 lbs.in when #6 screw is used.


**T9AS/V – Mounting & Termination Code 1**

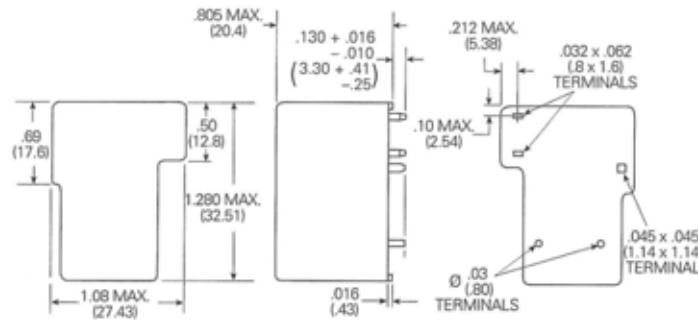

**Wiring Diagrams (Bottom Views)**


**1 Form A**

**1 Form C**




**PC Board Layouts (Bottom Views)**

**T9AP/S – Mounting & Termination Code 2**

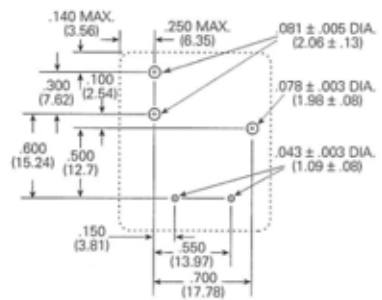

**T9AS/V – Mounting & Termination Code 1**

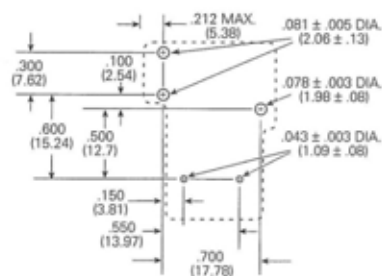

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.



Specifications and availability subject to change.







## Dimensions

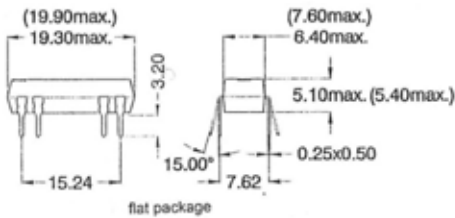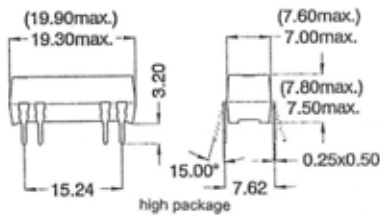

### Flat package

- 1 Form A Standard
- 1 Form A Diode 6-9
- 1 Form C Standard


### High package

- 1 Form A Diode 2-6
- 1 Form B Standard
- 1 Form B Diode 2-6
- 1 Form C Diode 2-6
- 2 Form A Standard
- 2 Form A Diode 2-6

### Characteristics:

- Low profile package
- Standardized pin configurations
- Versions with diode available
- Version with mercury wetted switches on request
- IC-pin compatible
- TTL drive possible
- 4,25 kVDC insulation at diagram 13
- UL approval

### Order information

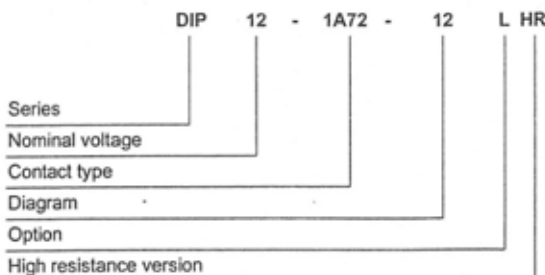

### Contact Data

Contact type	Other switches on request				
	71	72	75	84	90
Contact form	A / B dry	A / B dry	A / B dry	A / B dry	C / dry
Rated power	max. (W)	10	15	10	3
Switching voltage	max. (VDC)	200	200	500	400
Switching current	max. (A)	0,5	1,0	0,5	0,5
Carry current	max. (A)	1,0	1,25	1,0	1,0
Contact resistance	max. (mΩ)	150	150	200	150
Insulation resistance	min. (Ω)	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>10</sup>	10 <sup>11</sup>
Breakdown voltage	min. (VDC)	250	250	1'500*	700
Operating time incl. bounce	typ. (ms)	0,5	0,5	0,5	2,0
Releasing time	typ. (ms)	0,1	0,1	0,1	0,1
Shock	at 11 ms max. (g)	150	150	30	50
Vibration	max. (g)	10	10	30	35
	(Hz)	10 - 2000	10 - 2000	50 - 1500	10 - 2000

Data at 140% pull-in energization and 20°C

\* (p. 2 for breakdown voltage)

### Relay Data

Operating temperature (°C)	-20 / +70
Storage temperature (°C)	-35 / +95
Insulation coil-contact min. (kV)	1,5 DC (4,25 DC / 3,0 AC at diagram 13L)
Insulation coil-contact min. (Ω)	10 <sup>11</sup>
Life expectancy	Dependent upon load, please refer to factory
Soldering time / temperature max.	10 Sec. / 260 °C
Washability	Fully sealed

### Coil Data

Data at 20°C

Contact form	Contact type	Diagram	Nominal voltage (VDC)	Coil resistance ±10% (Ω)	Pull-in voltage maximum (VDC)	Drop-out voltage minimum (VDC)	U max. 20°C (VDC)	U max. 60°C @ 14 50° C (VDC)	Nominal power (mW)
1A	71	10/11 12/13 16	5	500 (200)	3,5	0,75	22,0	14,0	50
	72		12	1'000	8,4	1,8	33,0	21,0	144
	75		15	2'000	10,5	2,2	44,0	28,5	113
	84		24	2'000	16,8	3,6	44,0	28,5	288
1B	71	19	5	500 (200)	3,5	0,75	6,5	6,5	50
	72		12	1'000	8,4	1,8	15,6	15,6	144
	75		15	2'000	10,5	2,2	19,5	19,5	113
	84		24	2'000	16,8	3,6	31,2	30,0	288
2A	71	21	5	200 (140)	3,5	0,75	14,0	9,0	125
	72		12	500	8,4	1,8	25,0	16,0	288
	75		15	2'000	10,5	2,2	47,0	30,5	113
	84		24	2'000	16,8	3,6	47,0	30,5	288
1C	90	51	5	200	3,5	0,75	13,0	8,0	125
			12	500	8,4	1,8	22,0	14,0	288
			15	2'000	10,5	2,2	44,0	28,5	113
			24	2'000	16,8	3,6	44,0	28,5	288
1A	71 72	10/11 12/13 16 High resist. type	5	1'000	3,5	0,75	33,0	21,0	25
			12	2'000	8,4	1,8	44,0	28,5	72
1C	90	51 High resist. type	12	1'000	8,4	1,8	15,6	15,6	144

Other coil resistance values on request

Data in ( ) are valid for switch 75 and 84

### Example for ordering

DIP 12 - 1A72 - 12LHR


DIP series  
12V nominal voltage  
1 formA switch type 72  
Diagram 12  
No Option  
High resistance version

Surface Mount  
and Single-in-Line  
versions also available  
- Catalogue on request

## Diagram

View on component side


Pitch 2,54

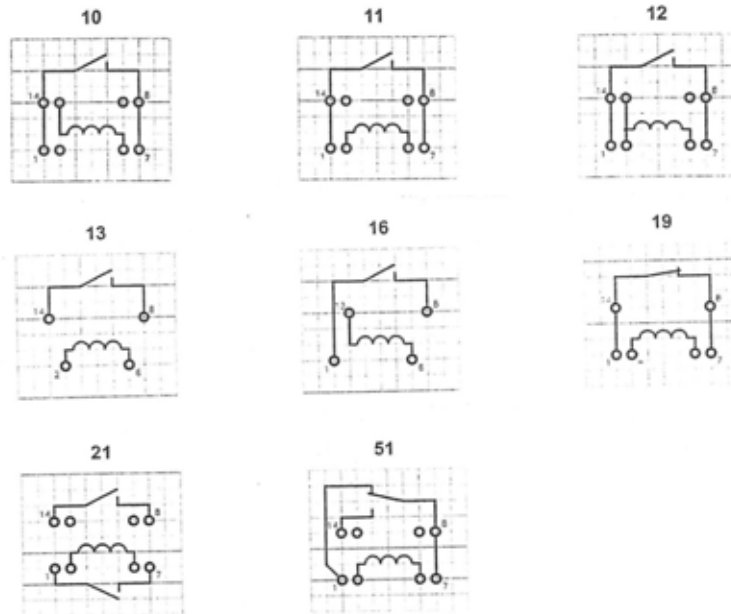

## Options

( ) Versions with magnetic screen

Pitch 2,54

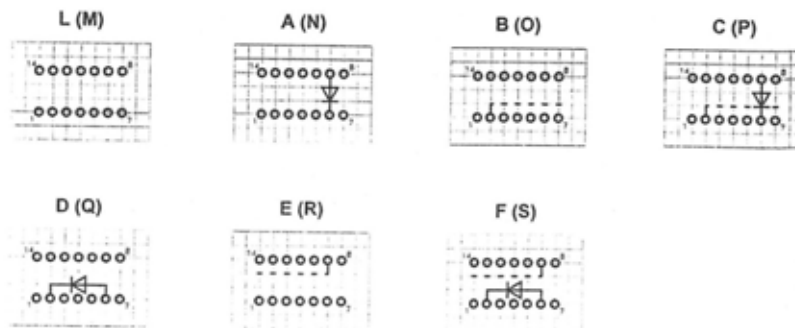


Contact form	Casing	Diagram	Options						
			L (M)	A (N)	B (O)	C (P)	D (Q)	E (R)	F (S)
1A	flat package	10	X	X	X	X		X	
		11	X	X				X	
		12	X	X				X	
		13	X						
		16	X						
1A	high package	11					X		X
		12					X		X
		13					X		
1B	high package	19	X				X		
2A	high package	21	X				X	X	
1C	flat package	51	X	X					
	high package	51					X	X	X





### Relay Data

Operating temperature	(°C)	-20 / +70 (mercury wetted -20 / +55)
Storage temperature	(°C)	-40 / +105 (mercury wetted -35 / +105)
Insulation coil-contact	min. (kVAC)	2,0 (4,5 at sundry diagrams)
Insulation coil-contact	min. (Ω)	10 <sup>10</sup> (10 <sup>11</sup> )
Life expectancy		Dependent upon load, please refer to factory
Soldering time / temperature	max.	5 Sec. / 260 °C
Washability		Fully sealed

Version:  
1A / 1C




2A / 1B / 1E




### Diagram

11



4,5 kVAC

13



4,5 kVAC

21



4,5 kVAC

Pitch 2,54

View on component side

### Contact Data

Contact type		71	74
Contact form		A/B / dry	A/B / dry
Rated power	(W)	10	30
Switching voltage	max. (VDC)	200	200 (250 AC)
Switching current	max. (A)	0,5	1,0
Carry current	max. (A)	1,0	2,5
Contact resistance	max. (mΩ)	150	120
Insulation resistance	min. (Ω)	10 <sup>10</sup>	10 <sup>11</sup>
Breakdown voltage	min. (VDC)	250	430
Operating time incl. bounce	typ. (ms)	0,5	0,5
Releasing time	typ. (ms)	0,2	0,2
Shock	at 11 ms max. (g)	150	500
Vibration	max. (g)	10	10
	(Hz)	10 - 2000	10 - 2000

Data at 140% pull-in energization and 20°C

Other switches on request


### Coil Data

Data in ( ) are valid for versions with metal case

Data at 20°C

Contact form	Contact type	Diagram	Nominal voltage	Coil resistance +/- 10%	Pull-in voltage maximum	Drop-out voltage	Nominal power
			(VDC)	(Ω)	(VDC)	(VDC)	(mW)
1A	71	11 V	5	345	3,5	0,28	72
			12	2'145	8,4	0,70	67
			24	7'845	16,8	1,40	73
1B	71	13 V	5	180	3,5	0,36	139
			12	1'100	8,4	0,90	118
			24	4'240	16,8	1,80	136
2A	71	21 V	5	180	3,5	0,25	133
			12	1'100	8,4	0,65	131
			24	4'240	16,8	1,30	136

### Order information

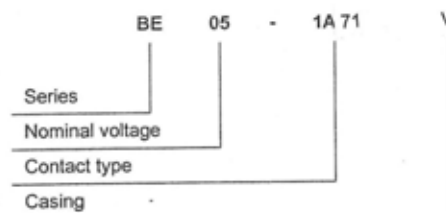

### Example for ordering

BE05-1A 71 - V

BE series  
5V nominal voltage  
1 formA switch type 71  
Plastic casing

Casing: M = metal, P = plastic, V = plastic (with 4,5 kVAC insulation voltage)

# FURTHER RELAYS

Not found what you're looking for? We have an extensive range of relays available from stock, both in our local warehouse and overseas. Detailed specification sheets are available for all relay products, and our staff are willing to help with technical support.

Please contact us at **ARLIN** with your requirements:

28 Commercial Drive Thomastown Vic 3074 Australia

**Sales Hotline: 1300 362 191**

Int. Tel: +61 3 9465 0011  
Fax: +61 3 9465 5088  
Email: [sales@arlin.com.au](mailto:sales@arlin.com.au)

**[www.arlin.com.au](http://www.arlin.com.au)**

All specifications in this catalogue are subject to change without notice.

**OTHER PRODUCTS AVAILABLE FROM ARLIN:**

switches & circuit breakers



IEC mains connections



fuses & fuseholders



main filters



buzzers & speakers



relays




mounting hardware



terminals



data connectors

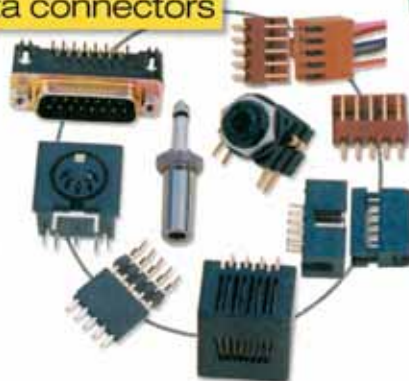

reed, pressure & tilt switches





ARLIN PTY LTD

28 Commercial Drive Thomastown Vic 3074 Australia

**Sales Hotline: 1300 362 191**

Int. Tel: +61 3 9465 0011  
Fax: +61 3 9465 5088  
Email: [sales@arlin.com.au](mailto:sales@arlin.com.au)

**[www.arlin.com.au](http://www.arlin.com.au)**

