

105 SERIES


D-SUB H.D. DIP STRAIGHT TYPE

Specifications:


Contact Resistance: 30mΩmax. at Dc 100mA
 Insulator Resistance: 1000MΩmin. at Dc 500V
 Current Rating: 3 AMP

Dielectric Withstanding






Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze
 Housing: PBT & 30% Glass Fiber (UL 94V-O)

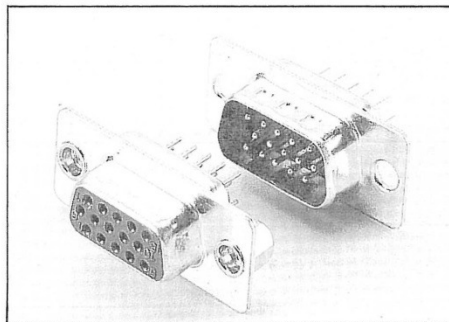

MALE

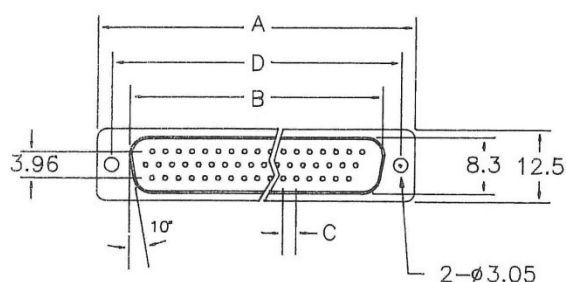

FEMALE

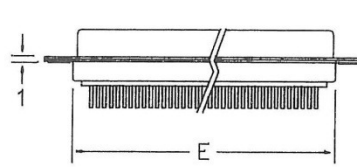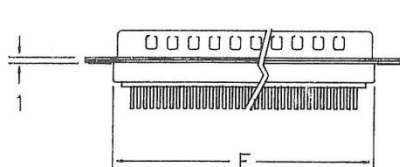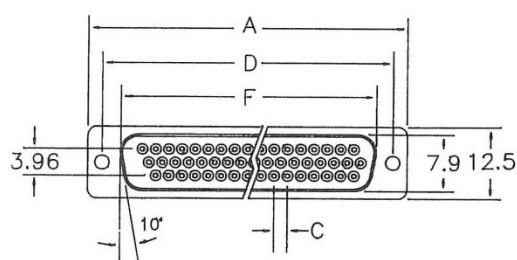

How to order

105 - 15 P C B N S
 1 2 3 4 5 6 7
 SERIES NO. 1 2 3 4 5 6 7
 NO. OF PINS: 15. 26. 44. 62. 78
 CONTACT TYPE: P-MALE S-FEMALE
 SHELL PLATED: C-CHROMATED, SHELL T-TIN SHELL
 PIN TYPE: S-STAMPED PIN M-MACHINED PIN
 OPTION ON SCREW: N-W/O SCREWS Y-WITH SCREW (4-40VNC)
 OPTION ON INSULATOR: B-BLUE K-BLACK W-WHITE

Dimension

Position	A	B	C	D	E	F
15	30.8	16.9	2.29	24.99	19.3	16.3
26	39.1	26.6	2.29	33.32	27.5	24.7
44	53.0	39.0	2.29	47.04	41.3	38.4
62	69.3	55.4	2.41	63.50	57.7	54.8
78	66.90	52.86	2.41	61.11	55.30	52.34

YS

106 SERIES


D-SUB H.D. CRIMP TYPE

Specifications:


Contact Resistance: 30mΩmax. at DC 100mA
 Insulator Resistance: 1000MΩmin. at DC 500V
 Current Rating: 3 AMP

Dielectric Withstanding






Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze
 Housing: PBT & 30% Glass Fiber (UL 94V-O)

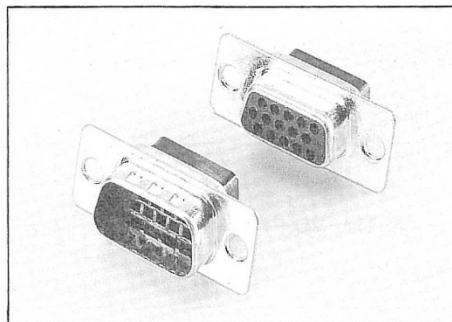

MALE

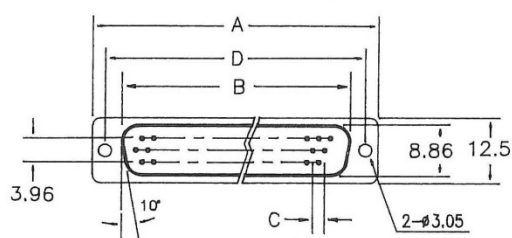

FEMALE

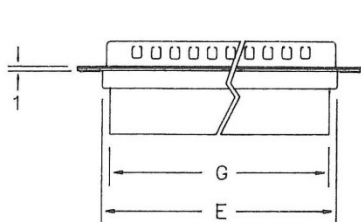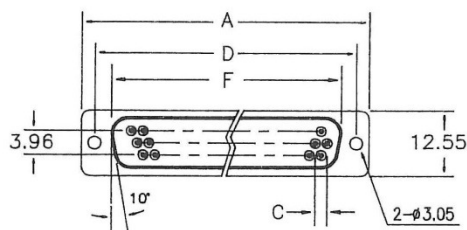

How to order

106 - 15 P T B
 1 2 3 4 5
 SERIES NO. 1 2 3 4 5
 NO. OF PINS: 15, 26, 44, 62, 78
 CONTACT TYPE: P-MALE, S. FEMALE
 OPTION ON INSULATOR: B-BLUE, K-BLACK, W-WHITE
 SHELL PLATED: C-CHROMATED SHELL, T-TIN SHELL

Dimension


Position	A	B	C	D	E	F	G
15	30.8	24.99	2.29	16.92	19.28	16.33	14.9
26	39.1	33.32	2.29	25.25	21.51	24.66	23.9
44	53.0	47.04	2.29	38.25	41.30	38.38	37.7
62	69.3	63.50	2.41	55.42	57.71	54.84	54.1
78	66.9	52.86	2.41	61.11	55.30	52.34	51.66

YS





107 SERIES

D-SUB RIGHT ANGLE TYPE

How to order

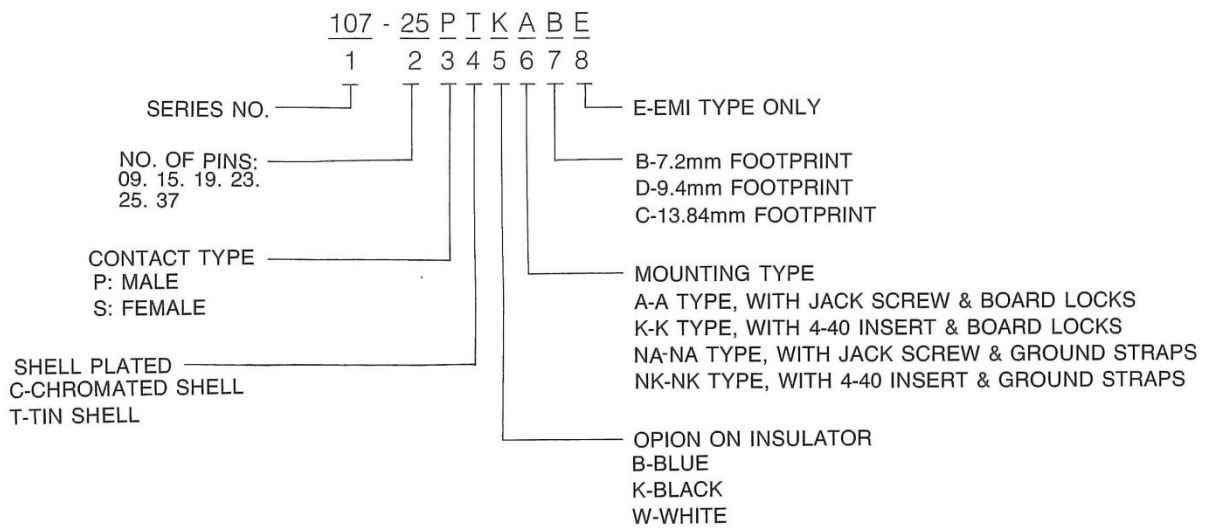

D-SUB CONNECTORS RIGHT ANGLE MOUNTING OPTIONS

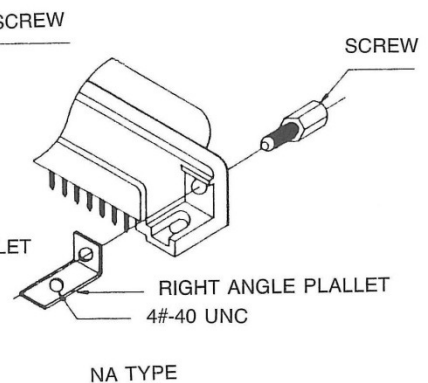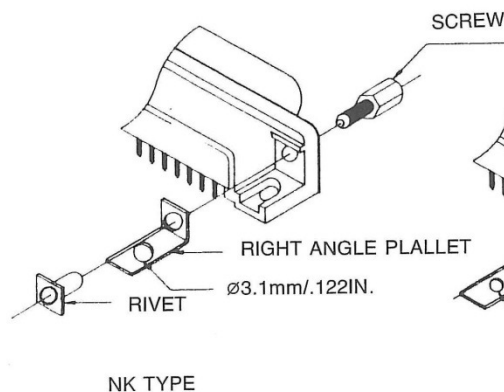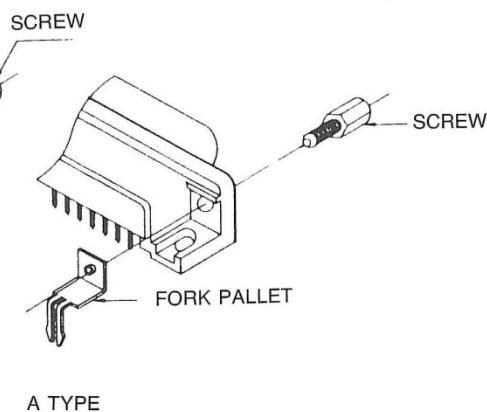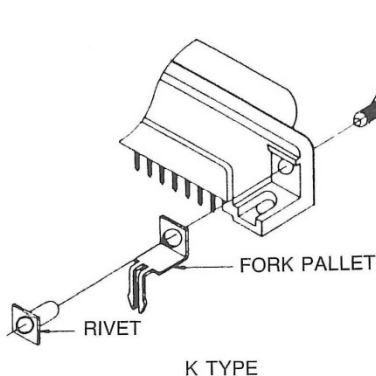

107 SERIES


D-SUB RIGHT ANGLE TYPE (7.2mm)

Specifications:


Contact Resistance: 30mΩmax. at DC 100mA
 Insulator Resistance: 1000MΩmin. at DC 500V
 Current Rating: 5 AMP

Dielectric Withstanding




Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze
 Housing: PBT & 30% Glass Fiber (UL 94V-O)

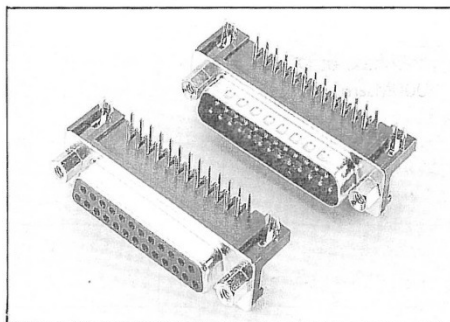

FEMALE

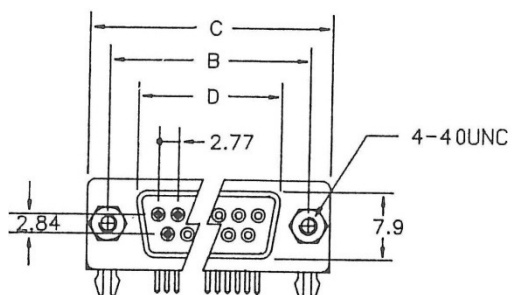

MALE

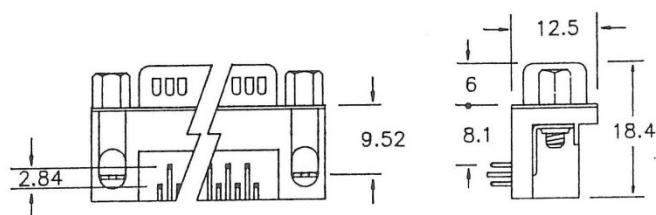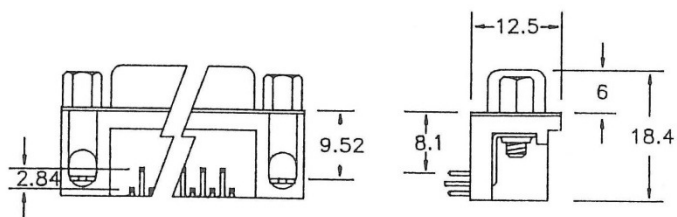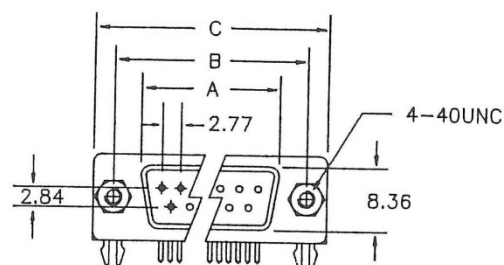

Dimension

Position	A	B	C	D
9	16.92	24.99	30.81	16.33
15	25.25	33.32	39.14	24.66
19		39.03	44.80	29.92
23		44.36	50.30	35.18
25	38.96	47.04	53.04	38.38
37	55.42	63.50	69.32	54.84
50	52.86	61.11	66.90	52.34

YS

107 SERIES

D-SUB RIGHT ANGLE TYPE (9.4mm)

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA

Insulator Resistance: 1000MΩmin. at DC 500V

Current Rating: 5 AMP


Dielectric Withstanding

Voltage: AC 1000V For 1 minute


Operating Temperature: -55°C~+105°C

Contact: Brass or Phosphor Bronze



Housing: PBT & 30% Glass Fiber (UL 94V-O)

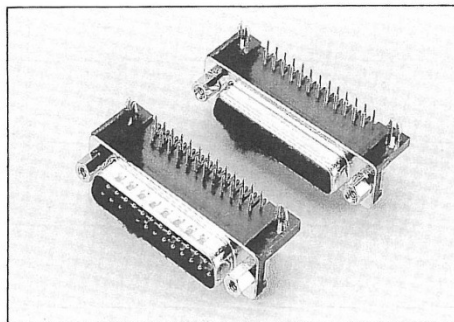


MALE

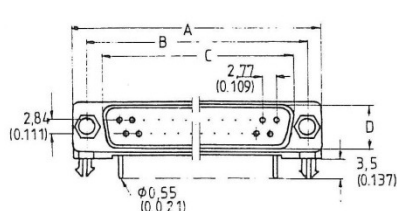

Y
10.8 (0.426)

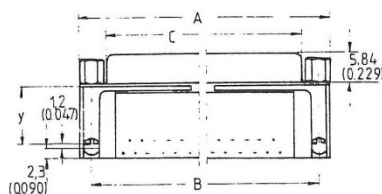

FEMALE

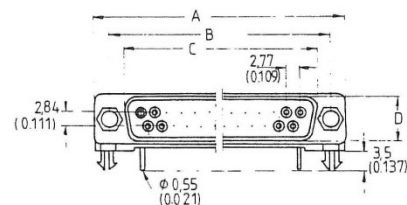

Dimension


No. of contacts	A	B	C	D
9	30.8	25.0	16.9	8.4
15	39.2	33.3	25.3	8.4
25	53.0	47.0	39.0	8.4
37	69.4	63.5	55.4	8.4

No. of contacts	A	B	C	D
9	30.8	25.0	16.9	8.4
15	39.2	33.3	25.3	8.4
25	53.0	47.0	39.0	8.4
37	69.4	63.5	55.4	8.4

YS


107 SERIES

D-SUB RIGHT ANGLE TYPE (13.84mm)


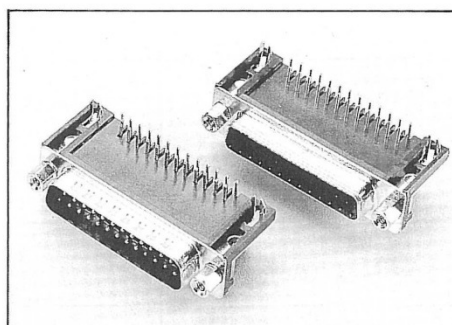


Dimension

NO. OF CONTACT	A	B	C
09M	16.92	24.99	30.81
15M	25.25	33.32	39.14
25M	38.96	47.04	53.04
37M	55.42	63.50	69.32

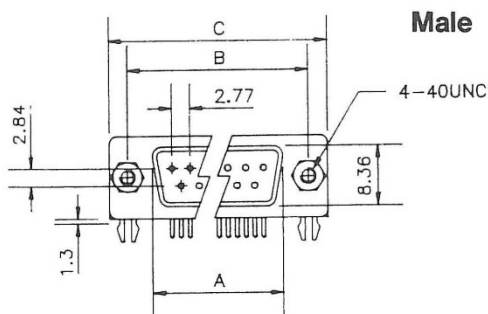


Male





Dimension


NO. OF CONTACT	A	B	C
09F	16.33	24.99	30.81
15F	24.66	33.32	39.14
25F	38.38	47.04	53.04
37F	54.84	63.50	69.32

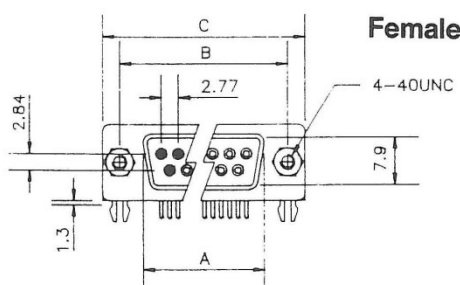


Female



Board lock type



TYPE 2



TYPE 1

