


PIEZO BUZZERS

PCB MOUNT

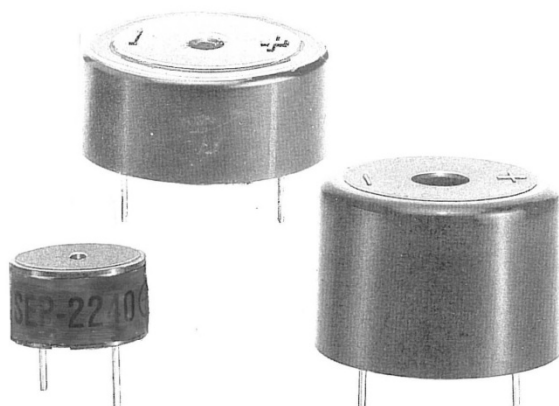

FEATURES:

- * DC OPERATION
- * P.C.B. MOUNT
- * LOW CURRENT DRAIN
- * 'S' TYPE WAVE SOLDERABLE AND WASHABLE
- * PULSED TONE ALSO AVAILABLE - ASK FOR DATA

Model No.	CPM121S (sealed)	CPM202S (sealed)	CPM212
Nominal Frequency $\pm 500\text{Hz}$	4,000	3,400	3,000
Operating Voltage (VDC)	3 - 15	3 - 30	3 - 20
Sound Pressure Level (db min)	80 at 10cm/12VDC	84 at 30cm/12VDC	95 at 30cm/12VDC
Current Consumption at 12VDC (mA max)	7	12	8
Tone	continuous	continuous	continuous
Operating Temp ($^{\circ}\text{C}$)	-30 - +35	-30 - +85	-20 - +60
TYPICAL VOLTAGE - SOUND PRESSURE CURVE CPM202			

ARLIN

28 COMMERCIAL DRIVE THOMASTOWN VIC. 3074, AUSTRALIA

PHONE: (+613) 9465 0011

TOLL FREE 1300 362 191

FAX: (+613) 9465 5088

Email: sales@arlin.com.au

ABN 18 839 247 078